

UTILITY CONTINUATION PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

A

Attorney Docket No.: 3243-2-4-1-1-1

Inventors: James M. Rosborough of 2400 South Brentwood Street, Lakewood, Colorado 80227
Steven J. Moore of 5559 Irish Pat Murphy Drive, Parker, Colorado 80134

Express Mail Label No.: EL367974673US

Title: "RESPONSE TIME MEASUREMENT APPARATUS AND METHOD"

Group Art Unit: 2731

Examiner: Vincent

Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

1c678 U.S. PTO
09/363001
07/28/99

This is a Continuation application of pending prior application No. 09/186,906 filed November 5, 1998, which is a continuation of pending prior application no. 09/133,069, filed August 12, 1998. The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied, is considered to be part of the disclosure of the accompanying application and is hereby incorporated by reference.

Enclosed for filing with the above-identified utility patent application, please find the following:

1. ☒ Copy of Oath/Declaration filed in U.S. Application 09/133,069 on March 29, 1999, as part of the Petition to Correct Inventorship. A copy of the Petition to Correct Inventorship is attached hereto as Appendix A.
2. ☒ Information Disclosure Statement (IDS/PTO-1449)
3. ☒ Preliminary Amendment and Request for Interference under 37 CFR 1.607
4. ☒ Return Postcard (MPEP 503) (should be specifically itemized)

FEE CALCULATION:

Please enter the Preliminary Amendment and Request for Interference before calculating the filing fee.

	(COL. 1) NO. FILED			(COL. 2*) NO. EXTRA	SMALL ENTITY			LARGE ENTITY	
					RATE	FEE		RATE	FEE
BASIC FEE:						\$380.00	OR		\$760.00
TOTAL CLAIMS:	20	-	20	0	X \$9 =	\$0.00	OR	X \$18 =	\$0.00
INDEP. CLAIMS:	20	-	3	17	X \$39 =	\$0.00	OR	X \$78 =	\$1,326.00
MULTIPLE DEPENDENT CLAIMS					+ \$130 =	\$	OR	+\$260 =	\$0.00
*IF THE DIFFERENCE IN COL. 2 IS LESS THAN ZERO, ENTER "O" IN COL. 2.					TOTAL:	0.00			\$2,086.00

OTHER INFORMATION:

1. ☒ The Commissioner is hereby authorized to debit any underpayments or credit any overpayment to Deposit Account No. 19-1970.
2. ☒ The Commissioner is hereby authorized to charge all required fees for extensions of time under §1.17 to Deposit Account No. 19-1970.
3. ☒ The Power of Attorney appears in the original papers of the prior pending application.


4. [X] The prior application is assigned to Platinum Technologies.

5. Correspondence Address:

Douglas W. Swartz
SHERIDAN ROSS P.C.
1700 Lincoln Street, Suite 3500
Denver, Colorado 80203
Telephone: (303) 863-9700
Facsimile: (303) 863-0223

Respectfully Submitted,

SHERIDAN ROSS P.C.

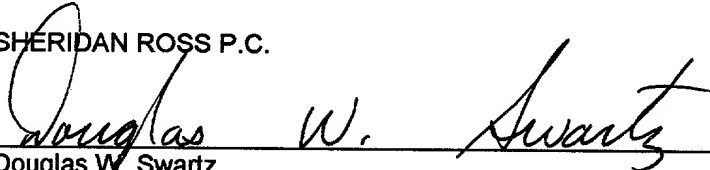

Douglas W. Swartz
Registration No. 37,739

Date: July 28, 1999

"EXPRESS MAIL" MAILING LABEL NUMBER. EL 367974673US
DATE OF DEPOSIT 7/28/99

I HEREBY CERTIFY THAT THIS PAPER OR FEE IS BEING
DEPOSITED WITH THE UNITED STATES POSTAL SERVICE "EXPRESS
MAIL POST OFFICE TO ADDRESSEE" SERVICE UNDER 37 CFR 1.10
ON THE DATE INDICATED ABOVE AND IS ADDRESSED TO THE
ASSISTANT COMMISSIONER FOR PATENTS, WASHINGTON, D.C.
20231.

TYPED OR PRINTED NAME Christine Jacquet

SIGNATURE Christine Jacquet

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In Re the Application of:

ROSBOROUGH ET AL.

Serial No.: not yet assigned

Filed: herewith

Atty. File No.: 3243-2-4-1-1-1

For: "NETWORK PERFORMANCE
MONITORING" (As Amended)

Box PATENT APPLICATION
Assistant Commissioner for Patents
Washington, D.C. 20231

Group Art Unit:

Examiner:

PRELIMINARY AMENDMENT AND
REQUEST FOR INTERFERENCE UNDER
37 CFR §1.607

"EXPRESS MAIL" MAILING LABEL NUMBER EL36797467305
DATE OF DEPOSIT 7/28/99

I HEREBY CERTIFY THAT THIS PAPER OR FEE IS BEING
DEPOSITED WITH THE UNITED STATES POSTAL SERVICE "EXPRESS
MAIL POST OFFICE TO ADDRESSEE" SERVICE UNDER 37 CFR 1.10
ON THE DATE INDICATED ABOVE AND IS ADDRESSED TO THE
ASSISTANT COMMISSIONER FOR PATENTS WASHINGTON, D.C.
20231

TYPED OR PRINTED NAME Christine Jacquet
SIGNATURE Christine Jacquet

Dear Sir:

Prior to the initial review of the above-identified patent application by the Examiner, please
enter the following Preliminary Amendment.

Please amend the application as follows:

IN THE SPECIFICATION:

Please amend the title to read as follows:

--NETWORK PERFORMANCE MONITORING--

At page 1, in the section titled "CROSS REFERENCE TO RELATED APPLICATIONS"
kindly delete the existing language in its entirety and substitute the following:

--The present application is a continuation of U.S. Patent Application Serial No. 09/186,906,
filed November 5, 1998, which is a continuation of U.S. Patent Application Serial No. 09/133,069,
filed August 12, 1998, which is a continuation of U.S. Patent Application Serial No. 09/066,508, filed

662220" T00E9E60

April 23, 1998 (now abandoned), which is a continuation of U.S. Patent Application No. 08/513,435 (now issued as U.S. 5,781,449). --

IN THE CLAIMS:

Please cancel all claims pending in the application, i.e., Claims 1-28, without prejudice to or disclaimer of the subject matter contained therein, and add the following new Claims 29-48.

29. (New) An apparatus for analyzing network activity, the apparatus comprising:

a packet capturing module, for accessing the packets traversing a network, the packets having source and destination addresses of network devices exclusive of the apparatus, and for filtering the packets to produce packet data, wherein the packet capturing module produces the packet data by retrieving a predetermined address, comparing the predetermined address to the source and destination addresses for a current packet, and retaining the current packet when one of the source and destination addresses for the current packet matches the predetermined address;

a packet analyzing module, in communication with the packet capturing module, for producing decoded packet data, wherein the decoded packet data includes a plurality of patterns of packets, and for producing transaction data from the decoded packet data, wherein the transaction data is derived from a time value for identifying a substantially optimal collection of patterns of packets indicative of transaction instances; and

a data management module, in communication with the packet capturing module and the packet analyzing module, for analyzing the packet data and the transaction data to provide an indication of network usage.

30. (New) An apparatus for analyzing network activity, the apparatus comprising:

a packet capturing module, for accessing the packets traversing a network, the packets having source and destination addresses of network devices exclusive of the apparatus, and for filtering the packets to produce packet data, wherein the packet capturing module produces the packet data by accessing a predetermined address, comparing the predetermined address to the source and destination addresses for a current packet, and retaining the current packet when one of the source and destination addresses for the current packet matches the predetermined address;

a packet analyzing module, in communication with the packet capturing module, for producing decoded packet data and for producing transaction data from the decoded packet data; and

a data management module, in communication with the packet capturing module and the packet analyzing module, for analyzing at least one of the packet data and the transaction data to provide an indication of network usage.

31. (New) An apparatus for analyzing network activity, the apparatus comprising:

a packet capturing module, for accessing the packets traversing a network, the packets having source and destination addresses of network devices exclusive of the apparatus, and for filtering the packets to produce packet data, wherein the packet capturing module produces the packet data by retrieving a predetermined port address, comparing the predetermined port address to a source port address for a current packet, comparing the predetermined port address to a destination port address for the current packet, and retaining

the current packet when one of the source and destination port addresses for the current packet matches the predetermined port address;

10 a packet analyzing module, in communication with the packet capturing module, for producing decoded packet data, wherein the decoded packet data includes a plurality of patterns of packets, and for producing transaction data from the decoded packet data, wherein the transaction data is derived from a time value for identifying a substantially optimal collection of patterns of packets indicative of transaction occurrences; and

15 a data management module, in communication with the packet capturing module and the packet analyzing module, for analyzing the packet data and the transaction data to provide an indication of network usage.

32. (New) An apparatus for analyzing network activity, the apparatus comprising:

5 a packet capturing module, for accessing the packets traversing a network, the packets having source and destination addresses other than an address corresponding to the apparatus, and for filtering the packets to produce raw packet data, wherein the packet capturing module produces the raw packet data by accessing a predetermined port address, comparing the predetermined port address to a source port address for a current packet, comparing the predetermined port address to a destination port address for the current packet, and retaining the current packet when one of the source and destination port addresses for the current packet matches the predetermined port address;

10 a packet analyzing module, in communication with the packet capturing module, for producing decoded packet data and for producing transaction data from the decoded packet data; and

a data management module, in communication with the packet capturing module and the packet analyzing module, for analyzing at least one of the raw packet data, the decoded
15 packet data, and the transaction data to provide an indication of network usage.

33. (New) An apparatus for analyzing network activity, the apparatus comprising:

a packet capturing module, for accessing a plurality of packets traversing a network, the packets having source and destination addresses of network devices exclusive of the
5 apparatus, and for filtering the packets to produce packet data;

a packet analyzing module , in communication with the packet capturing module, for producing decoded packet data and for producing transaction data from the decoded packet data, the packet decoding module comprising (a) and (b) following:

(a) a packet decoder, for accessing the packet data and producing the decoded
10 packet data by searching in text of the packet data for one or more key words; and

(b) a decoded packet recompiler, in communication with the packet decoder, for accessing the decoded packet data, segregating the packets from the decoded packet data into separate transactions between nodes by ordering according to thread and a time interval, sequencing the packets corresponding to each separate transaction by identifying a packet
15 position in a pattern corresponding to each separate transaction, and linking together the data

in each separate transaction when the identified positions are determined to produce the transaction data, wherein the transaction data is derived from a time value and identifies a collection of the patterns of packets that is substantially optimal for identifying transaction instances; and

20 a data management module, in communication with the packet capturing module and the packet analyzing module, for analyzing the packet data and the transaction data to provide an indication of network usage.

34. (New) An apparatus for analyzing network activity, the apparatus comprising:

5 a packet capturing module, for accessing packets traversing a network, the packets having source and destination addresses of network devices exclusive of the apparatus, and for filtering the packets to produce packet data;

 a packet analyzing module , in communication with the packet capturing module, for producing decoded packet data and for producing transaction data from the decoded packet data, the packet analyzing module comprising:

10 a packet decoder, for accessing the packet data and producing the decoded packet data; and

 a decoded packet recompiler, in communication with the packet decoder, for accessing the decoded packet data, segregating the packets from the decoded packet data into separate transactions between nodes, sequencing the packets corresponding to each separate

transaction, and linking together the data in each separate transaction to produce the transaction data; and

a data management module, in communication with the packet capturing module and the packet analyzing module, for analyzing at least one of the packet data and the transaction data to provide an indication of network usage.

35. (New) For use with a network activity analyzer capable of being coupled to a network transmission medium, a method of analyzing network activity, the method comprising:

accessing packets traversing the network, the packets having source and destination addresses of network devices exclusive of the network activity analyzer;

filtering the packets to produce packet data by (a) through (c) following:

(a) accessing a predetermined address;

(b) comparing the predetermined address to the source and destination addresses for a current packet; and

(c) retaining the current packet when one of the source and destination addresses for the current packet matches the predetermined address;

producing decoded packet data, wherein the decoded packet data includes a plurality of patterns of packets;

producing transaction data from the decoded packet data, wherein the transaction data is derived from a time value and identifies a substantially optimal collection of patterns of packets indicative of transaction instances; and

analyzing the packet data and the transaction data to provide an indication of network usage.

36. (New) For use with a network activity analyzer capable of being coupled to a network transmission medium, a method of analyzing network activity, the method comprising:

accessing packets traversing the network, the packets having source and destination addresses of network devices exclusive of the network activity analyzer;

filtering the packets to produce raw packet data by (a) through (c) following:

(a) accessing a predetermined address;

(b) comparing the predetermined address to the source and destination addresses for a current packet; and

(c) retaining the current packet when one of the source and destination addresses for the current packet matches the predetermined address;

producing decoded packet data;

producing transaction data from the decoded packet data; and

analyzing the decoded packet data and the transaction data to provide an indication of network usage.

37. (New) For use with a network activity analyzer capable of being coupled to a network transmission medium, a method of analyzing network activity, the method comprising:

accessing packets traversing the network, the packets having source and destination
5 addresses of network devices exclusive of the network activity analyzer;

filtering the packets to produce packet data by: (a) accessing a predetermined port
address; (b) comparing the predetermined port address to source and destination port
addresses for a current packet; and (c) retaining the current packet when one of the source
and destination port addresses for the current packet matches the predetermined port address;

10 producing decoded packet data, wherein the decoded packet data includes a plurality
of patterns of packets;

producing transaction data from the decoded packet data, wherein the transaction data
is derived from a time value for identifying a substantially optimal collection of patterns of
packets indicative of transaction occurrences; and

15 analyzing the packet data and the transaction data to provide an indication of network
usage.

38. (New) For use with a network activity analyzer capable of being coupled
to a network transmission medium, a method of analyzing network activity, the method
comprising:

accessing packets traversing the network, the packets having source and destination
5 addresses of network devices other than an address corresponding to the network activity
analyzer;

filtering the packets to produce raw packet data by: accessing a predetermined port
address; comparing the predetermined port address to source and destination port addresses

for a current packet; and retaining the current packet when one of the source and destination
10 port addresses for the current packet matches the predetermined port address;

producing decoded packet data;

producing transaction data from the decoded packet data; and

analyzing at least one of the decoded packet data and the transaction data to provide
an indication of network usage.

39. (New) For use with a network activity analyzer capable of being coupled to
a network transmission medium, a method of analyzing network activity, the method
comprising:

accessing packets traversing the network, the packets having source and destination
5 addresses of network devices exclusive of the network activity analyzer;

filtering the packets to produce packet data;

producing decoded packet data by searching in text of the packet data for one or more
key words;

producing transaction data from the decoded packet data by (a) accessing the decoded
10 packet data; (b) segregating the packets from the decoded packet data into separate
transactions between nodes of the network by ordering according to thread and a time
interval; (c) sequencing the packets corresponding to each separate transaction by identifying
a packet position in a pattern corresponding to each separate transaction; and (d) linking
together the data in each separate transaction when the identified positions are determined to
15 produce the transaction data, wherein the transaction data is derived from a time value and

identifies a collection of the patterns that is substantially optimal for identifying transaction instances; and

analyzing the packet data and the transaction data to provide an indication of network usage.

40. (New) For use with a network activity analyzer capable of being coupled to a network transmission medium, a method of analyzing network activity, the method comprising:

accessing packets traversing the network, the packets having source and destination addresses other than an address corresponding to the network activity analyzer;

filtering the packets to produce raw packet data;

producing decoded packet data;

producing transaction data from the decoded packet data by accessing the decoded packet data; segregating the packets from the decoded packet data into separate transactions between nodes of the network; sequencing the packets corresponding to each separate transaction; and linking together the data in each separate transaction to produce the transaction data; and

analyzing at least one of the raw packet data, the decoded packet data, and the transaction data to provide an indication of network usage.

41. (New) For use with a network activity analyzer capable of being coupled to a network transmission medium, a method of analyzing network activity, the method comprising;

accessing packets traversing the network, the packets having source and destination
5 addresses of devices exclusive of the activity analyzer;

filtering the packets to produce packet data;

producing decoded packet data by searching in text of the packet data for one or more
key words;

producing transaction data from the decoded packet data by accessing the decoded
10 packet data; segregating the packets from the decoded packet data into separate transactions
between nodes by ordering according to thread and a time interval; sequencing the packets
corresponding to each separate transaction by identifying a packet position in a pattern
corresponding to each separate transaction; and linking together the data in each separate
transaction when the identified positions are determined to produce the transaction data,
15 wherein the transaction data is derived from a time value and identifies a collection of the
patterns that is substantially optimal for identifying transaction instances; and

producing translated transaction data from the transaction data wherein the translated
transaction data includes response data aggregated according to a fixed time interval; and

analyzing the packet data and the transaction data to provide an indication of network
20 usage.

42. (New) For use with a network activity analyzer capable of being coupled to a network transmission medium, a method of analyzing network activity, the method comprising;

accessing packets traversing the network, the packets having source and destination addresses of devices exclusive of the activity analyzer;

filtering the packets to produce packet data;

producing decoded packet data;

producing transaction data from the decoded packet data by accessing the decoded packet data; segregating the packets from the decoded packet data into separate transactions between nodes; sequencing the packets corresponding to each separate transaction; and linking together the data in each separate transaction;

producing translated transaction data from the transaction data; and

analyzing the packet data and the transaction data to provide an indication of network usage.

43. (New) An apparatus for analyzing network activity, the apparatus comprising: means for accessing packets traversing the network, the packets having source and destination addresses of devices exclusive of the network activity analyzer;

means for filtering the packets to produce packet data, wherein the means for filtering the packets to produce packet data includes routines for retrieving a predetermined address; comparing the predetermined address to the source and destination addresses for a current

packet; and retaining the current packet when one of the source and destination addresses for the current packet matches the predetermined address;

means for producing decoded packet data, wherein the decoded packet data includes a plurality of patterns of packets;

means for producing transaction data from the decoded packet data, wherein the transaction data is derived from a time value for identifying a substantially optimal collection of patterns of packets indicative of transaction instances; and

means for analyzing the packet data and the transaction data to provide an indication of network usage.

44. (New) An apparatus for analyzing network activity, the apparatus comprising:

means for accessing packets traversing the network, the packets having source and destination addresses of devices exclusive of the network activity analyzer;

means for filtering the packets to produce packet data, wherein the means for filtering the packets to produce packet data includes routines for retrieving a predetermined address; comparing the predetermined address to the source and destination addresses for a current packet; and retaining the current packet when one of the source and destination addresses for the current packet matches the predetermined address;

means for producing decoded packet data;

means for producing transaction data from the decoded packet data; and

means for analyzing the packet data and the transaction data to provide an indication of network usage.

45. (New) An apparatus for analyzing network activity, the apparatus comprising:

means for accessing packets traversing the network, the packets having source and destination addresses for network devices exclusive of the network activity analyzer;

means for filtering the packets to produce packet data, wherein the means for filtering the packets to produce packet data includes routines for accessing a predetermined port address; comparing the predetermined port address to a source port address for a current packet; comparing the predetermined port address to a destination port address for the current packet; and retaining the current packet when one of the source and destination port addresses for the current packet matches the predetermined port address;

means for producing decoded packet data, wherein the decoded packet data includes a plurality of patterns of packets;

means for producing transaction data from the decoded packet data, wherein the transaction data is derived from a time value for identifying a substantially optimal collection of packets indicative of transaction occurrences; and

means for analyzing the packet data and the transaction data to provide an indication of network usage.

46. (New) An apparatus for analyzing network activity, the apparatus comprising:

means for accessing packets traversing the network, the packets having source and destination addresses for network devices other than an address corresponding to the network activity analyzer;

47. (New) An apparatus for analyzing network activity, the apparatus comprising:

means for accessing packets traversing the network, the packets having source and destination addresses other than an address corresponding to the network activity analyzer;

means for filtering the packets to produce packet data;

means for producing decoded packet data by searching in text of the packet data for one or more key words;

means for producing transaction data from the decoded packet data, wherein the means for producing transaction data includes routines for accessing the decoded packet data; segregating the packets from the decoded packet data into separate transactions between nodes by ordering according to thread and a time interval; sequencing the packets corresponding to each separate transaction by identifying a packet position in a pattern

corresponding to each separate transaction; and linking together the data in each separate transaction when the identified positions are determined to produce the transaction data, wherein the transaction data is derived from a time value and identifies a collection of the patterns that is substantially optimal for identifying transaction instances; and

means for analyzing the packet data and the transaction data to provide an indication of network usage.

48. (New) An apparatus for analyzing network activity, the apparatus comprising;
 means for accessing packets traversing the network, the packets having source and destination addresses other than an address corresponding to the network activity analyzer;
 means for filtering the packets to produce raw packet data;
 means for producing decoded packet data;
 means for producing transaction data from the decoded packet data, wherein the means for producing transaction data includes routines for accessing the decoded packet data; segregating the packets from the decoded packet data into separate transactions between nodes; sequencing the packets corresponding to each separate transaction; and linking together the data in each separate transaction to produce the transaction data; and
 means for analyzing the decoded packet data and the transaction data to provide an indication of network usage.

REMARKS

Claims 29 through 48 are substantially copied from U.S. Patent No. 5,787,253 granted July 28, 1998 to McCreery, et al. and assigned to the A.G. Group in accordance with

37 C.F.R. §1.607(a). In particular, the correspondence between the claims herein and those of the McCreery patent is provided herein below. The substantially copied claims may be specifically applied to Applicants' disclosures as follows:

COPIED CLAIMS	APPLICANT'S DISCLOSURE
<p>29. (New) An apparatus for analyzing network activity, the apparatus comprising:</p> <p>a packet capturing module, for accessing the packets traversing a network, the packets having source and destination addresses of network devices exclusive of the apparatus, and for filtering the packets to produce packet data, wherein the packet capturing module produces the packet data by retrieving a predetermined address, comparing the predetermined address to the source and destination addresses for a current packet and retaining the current packet when one of the source and destination addresses for the current packet matches the predetermined address;</p> <p>a packet analyzing module, in communication with the packet capturing module, for producing decoded packet data, wherein the decoded packet data includes a plurality of patterns of packets, and for producing transaction data from the decoded packet data, wherein the transaction data is derived from a time value for identifying a substantially optimal collection of patterns of packets indicative of transaction instances; and</p> <p>a data management module, in communication with the packet capturing module and the packet analyzing module, for analyzing the packet data and the transaction data to provide an indication of network usage.</p>	<p>page 1, lines 5-8; page 4, lines 22-25; page 10, lines 5-19; page 32, lines 4-17; Figure 12</p> <p>page 4, lines 9-12; page 5, lines 10-18; page 10, line 21 to page 12, line 11; page 12, line 19- page 14, line 7; pg. 12, lines 5-8; page 15, line 15- page 16, line 4; Figures 1-6A; Abstract</p> <p>page 4, line 9- page 9, line 2; page 10, line 5- page 11, line 16; page 15, line 15- page 18, line 19; page 18, line 21- page 32, line 3; Figures 1-2 and 6A-11</p> <p>page 4, lines 9-25; page 6, line 12- page 8, line 12; page 10, lines 5-19; page 18, line 21- page 32, line 26; Figures 1-2 and 6A-12</p>

<p>30. (New) An apparatus for analyzing network activity, the apparatus comprising:</p> <p>a packet capturing module, for accessing the packets traversing a network, the packets having source and destination addresses of network devices exclusive of the apparatus, and for filtering the packets to produce packet data, wherein the packet capturing module produces the packet data by accessing a predetermined address, comparing the predetermined address to the source and destination addresses for a current packet, and retaining the current packet when one of the source and destination addresses for the current packet matches the predetermined address;</p> <p>a packet analyzing module, in communication with the packet capturing module, for producing decoded packet data and for producing transaction data from the decoded packet data; and</p> <p>a data management module, in communication with the packet capturing module and the packet analyzing module, for analyzing at least one of the packet data and the transaction data to provide an indication of network usage.</p>	<p>page 1, lines 5-8; page 4, lines 22-25; page 10, lines 5-19; page 32, lines 4-17; Figure 12</p> <p>page 4, lines 9-12; page 5, lines 10-18; page 10, line 21 to page 12, line 11; page 12, line 19- page 14, line 7; pg. 12, lines 5-8; page 15, line 15- page 16, line 4; Figures 1-6A; Abstract</p> <p>page 4, line 9- page 9, line 2; page 10, line 5- page 11, line 16; page 15, line 15- page 18, line 19; page 18, line 21- page 32, line 3; Figures 1-2 and 6A-11</p> <p>page 4, lines 9-25; page 6, line 12- page 8, line 12; page 10, lines 5-19; page 18, line 21- page 32, line 26; Figures 1-2 and 6A-12; claims 1-2 and 4-8</p>
<p>31. (New) An apparatus for analyzing network activity, the apparatus comprising:</p> <p>a packet capturing module, for accessing the packets traversing a network, the packets having source and destination addresses of network devices exclusive of the apparatus, and for filtering the packets to produce packet data, wherein the packet capturing module produces</p>	<p>page 1, lines 5-8; page 4, lines 22-25; page 10, lines 5-19; page 32, lines 4-17; Figure 12</p> <p>page 4, lines 9-12; page 5, lines 10-18; page 10, line 21 to page 12, line 11; page 12, line 19- page 14, line 7; pg. 12, lines 5-8; page 15, line 15- page 16, line 4; Figures 1-6A; Abstract</p>

<p>the packet data by retrieving a predetermined port address, comparing the predetermined port address to a source port address for a current packet, comparing the predetermined port address to a destination port address for the current packet, and retaining the current packet when one of the source and destination port addresses for the current packet matches the predetermined port address;</p> <p>a packet analyzing module, in communication with the packet capturing module, for producing decoded packet data, wherein the decoded packet data includes a plurality of patterns of packets, and for producing transaction data from the decoded packet data, wherein the transaction data is derived from a time value for identifying a substantially optimal collection of patterns of packets indicative of transaction occurrences; and</p> <p>a data management module, in communication with the packet capturing module and the packet analyzing module, for analyzing the packet data and the transaction data to provide an indication of network usage.</p>	<p>page 4, line 9- page 9, line 2; page 10, line 5- page 11, line 16; page 15, line 15- page 18, line 19; page 18, line 21- page 32, line 3; Figures 1-2 and 6A-11</p> <p>page 4, lines 9-25; page 6, line 12- page 8, line 12; page 10, lines 5-19; page 18, line 21- page 32, line 26; Figures 1-2 and 6A-12</p>
<p>32. (New) An apparatus for analyzing network activity, the apparatus comprising:</p> <p>a packet capturing module, for accessing the packets traversing a network, the packets having source and destination addresses other than an address corresponding to the apparatus, and for filtering the packets to produce raw packet data, wherein the packet capturing module produces the raw packet data by accessing a predetermined port address, comparing the</p>	<p>page 1, lines 5-8; page 4, lines 22-25; page 10, lines 5-19; page 32, lines 4-17; Figure 12</p> <p>page 4, lines 9-12; page 5, lines 10-18; page 10, line 21 to page 12, line 11; page 12, line 19- page 14, line 7; pg. 12, lines 5-8; page 15, line 15- page 16, line 4; Figures 1-6A; Abstract</p>

<p>predetermined port address to a source port address for a current packet, comparing the predetermined port address to a destination port address for the current packet, and retaining the current packet when one of the source and destination port addresses for the current packet matches the predetermined port address;</p> <p>a packet analyzing module, in communication with the packet capturing module, for producing decoded packet data and for producing transaction data from the decoded packet data; and</p> <p>a data management module, in communication with the packet capturing module and the packet analyzing module, for analyzing at least one of the raw packet data, the decoded packet data, and the transaction data to provide an indication of network usage.</p>	<p>page 4, line 9- page 9, line 2; page 10, line 5- page 11, line 16; page 15, line 15- page 18, line 19; page 18, line 21- page 32, line 3; Figures 1-2 and 6A-11</p> <p>page 4, lines 9-25; page 6, line 12- page 8, line 12; page 10, lines 5-19; page 18, line 21- page 32, line 26; Figures 1-2 and 6A-12; claims 1-2 and 4-8</p>
<p>33. (New) An apparatus for analyzing network activity, the apparatus comprising:</p> <p>a packet capturing module, for accessing a plurality of packets traversing a network, the packets having source and destination addresses of network devices exclusive of the apparatus, and for filtering the packets to produce packet data;</p> <p>a packet analyzing module, in communication with the packet capturing module, for producing decoded packet data and for producing transaction data from the decoded packet data, the packet decoding module comprising (a) and (b) following:</p> <p>(a) a packet decoder, for accessing the packet data and producing the decoded packet</p>	<p>page 1, lines 5-8; page 4, lines 22-25; page 10, lines 5-19; page 32, lines 4-17; Figure 12</p> <p>page 4, lines 9-12; page 5, lines 10-18; page 10, line 21 to page 12, line 11; page 12, line 19- page 14, line 7; pg. 12, lines 5-8; page 15, line 15- page 16, line 4; Figures 1-6A; Abstract</p> <p>page 4, line 9- page 9, line 2; page 10, line 5- page 11, line 16; page 15, line 15- page 18, line 19; page 18, line 21- page 32, line 3; Figures 1-2 and 6A-11</p> <p>page 16, line 13- page 18, line 19; Figures 1 and 2, 6A-6D, 7-9A, and</p>

<p>data by searching in text of the packet data for one or more key words; and</p> <p>(b) a decoded packet recompiler, in communication with the packet decoder, for accessing the decoded packet data, segregating the packets from the decoded packet data into separate transactions between nodes by ordering according to thread and a time interval, sequencing the packets corresponding to each separate transaction by identifying a packet position in a pattern corresponding to each separate transaction, and linking together the data in each separate transaction when the identified positions are determined to produce the transaction data, wherein the transaction data is derived from a time value and identifies a collection of the patterns of packets that is substantially optimal for identifying transaction instances; and</p> <p>a data management module, in communication with the packet capturing module and the packet analyzing module, for analyzing the packet data and the transaction data to provide an indication of network usage.</p>	<p>10-11</p> <p>page 6, line 12- page 8, line 5; page 19, line 12- page 22, line 18; Figures 6C-11</p> <p>page 4, lines 9-25; page 6, line 12- page 8, line 12; page 10, lines 5- 19; page 18, line 21- page 32, line 26; Figures 1-2 and 6A-12</p>
<p>34. (New) An apparatus for analyzing network activity, the apparatus comprising:</p> <p>a packet capturing module, for accessing packets traversing a network, the packets having source and destination addresses of network devices exclusive of the apparatus, and for filtering the packets to produce packet data;</p> <p>a packet analyzing module, in communication with the packet capturing module, for producing decoded packet data and for producing transaction data from the decoded packet data, the packet analyzing module</p>	<p>page 1, lines 5-8; page 4, lines 22- 25; page 10, lines 5-19; page 32, lines 4-17; Figure 12</p> <p>page 4, lines 9-12; page 5, lines 10-18; page 10, line 21 to page 12, line 11; page 12, line 19- page 14, line 7; pg. 12, lines 5-8; page 15, line 15- page 16, line 4; Figures 1- 6A; Abstract</p> <p>page 4, line 9- page 9, line 2; page 10, line 5- page 11, line 16; page 15, line 15- page 18, line 19; page 18, line 21- page 32, line 3; Figures 1-2 and 6A-11</p>

<p>comprising:</p> <p>a packet decoder, for accessing the packet data and producing the decoded packet data; and</p> <p>a decoded packet recompiler, in communication with the packet decoder, for accessing the decoded packet data, segregating the packets from the decoded packet data into separate transactions between nodes, sequencing the packets corresponding to each separate transaction, and linking together the data in each separate transaction to produce the transaction data; and</p> <p>a data management module, in communication with the packet capturing module and the packet analyzing module, for analyzing at least one of the packet data and the transaction data to provide an indication of network usage.</p>	<p>page 16, line 13- page 18, line 19; Figures 1 and 2, 6A-6D, 7-9A, and 10-11</p> <p>page 6, line 12- page 8, line 5; page 19, line 12- page 22, line 18; Figures 6C-11</p> <p>page 4, lines 9-25; page 6, line 12- page 8, line 12; page 10, lines 5-19; page 18, line 21- page 32, line 26; Figures 1-2 and 6A-12; claims 1-2 and 4-8</p>
<p>35. (New) For use with a network activity analyzer capable of being coupled to a network transmission medium, a method of analyzing network activity, the method comprising:</p> <p>accessing packets traversing the network, the packets having source and destination addresses of network devices exclusive of the network activity analyzer;</p> <p>filtering the packets to produce packet data by (a) through (c) following:</p> <p>(a) accessing a predetermined address;</p> <p>(b) comparing the predetermined address to the source and destination addresses for a current packet; and</p> <p>(c) retaining the current packet when</p>	<p>page 1, lines 5-8; page 4, lines 22-25; page 10, line 5- page 12, line 2; page 32, lines 4-17; Figures 1-2 and 12</p> <p>page 4, lines 9-12; page 5, lines 10-18; page 10, line 21 to page 12, line 11; page 12, line 19- page 14, line 7; pg. 12, lines 5-8; page 15, line 15- page 16, line 4; Figures 1-6A; Abstract</p> <p>page 4, lines 9-12; page 5, lines 10-18; page 10, line 21 to page 12, line 11; page 12, line 19- page 14, line 7; pg. 12, lines 5-8; page 15, line 15- page 16, line 4; Figures 1-6A; Abstract</p>

<p>one of the source and destination addresses for the current packet matches the predetermined address;</p> <p>producing decoded packet data, wherein the decoded packet data includes a plurality of patterns of packets;</p> <p>producing transaction data from the decoded packet data, wherein the transaction data is derived from a time value and identifies a substantially optimal collection of patterns of packets indicative of transaction instances; and</p> <p>analyzing the packet data and the transaction data to provide an indication of network usage.</p>	<p>page 4, line 9- page 9, line 2; page 10, line 5- page 11, line 16; page 15, line 15- page 18, line 19; page 18, line 21- page 32, line 3; Figures 1-2 and 6A-11</p> <p>page 4, line 9- page 9, line 2; page 10, line 5- page 11, line 16; page 15, line 15- page 18, line 19; page 18, line 21- page 32, line 3; Figures 1-2 and 6A-11</p> <p>page 4, lines 9-25; page 6, line 12- page 8, line 12; page 10, lines 5- 19; page 18, line 21- page 32, line 26; Figures 1-2 and 6A-12</p>
<p>36. (New) For use with a network activity analyzer capable of being coupled to a network transmission medium, a method of analyzing network activity, the method comprising:</p> <p>accessing packets traversing the network, the packets having source and destination addresses of network devices exclusive of the network activity analyzer;</p> <p>filtering the packets to produce raw packet data by (a) through (c) following:</p> <p>(a) accessing a predetermined address;</p> <p>(b) comparing the predetermined address to the source and destination addresses for a current packet; and</p> <p>(c) retaining the current packet when one of the source and destination addresses</p>	<p>page 1, lines 5-8; page 4, lines 22- 25; page 10, line 5- page 12, line 2; page 32, lines 4-17; Figures 1-2 and 12</p> <p>page 4, lines 9-12; page 5, lines 10-18; page 10, line 21 to page 12, line 11; page 12, line 19- page 14, line 7; pg. 12, lines 5-8; page 15, line 15- page 16, line 4; Figures 1- 6A; Abstract</p> <p>page 4, lines 9-12; page 5, lines 10-18; page 10, line 21 to page 12, line 11; page 12, line 19- page 14, line 7; pg. 12, lines 5-8; page 15, line 15- page 16, line 4; Figures 1- 6A; Abstract</p>

<p>for the current packet matches the predetermined address;</p> <p>producing decoded packet data;</p> <p>producing transaction data from the decoded packet data; and</p> <p>analyzing the decoded packet data and the transaction data to provide an indication of network usage.</p>	<p>page 4, line 9- page 9, line 2; page 10, line 5- page 11, line 16; page 15, line 15- page 18, line 19; page 18, line 21- page 32, line 3; Figures 1-2 and 6A-11</p> <p>page 4, line 9- page 9, line 2; page 10, line 5- page 11, line 16; page 15, line 15- page 18, line 19; page 18, line 21- page 32, line 3; Figures 1-2 and 6A-11</p> <p>page 4, lines 9-25; page 6, line 12- page 8, line 12; page 10, lines 5-19; page 18, line 21- page 32, line 26; Figures 1-2 and 6A-12</p>
<p>37. (New) For use with a network activity analyzer capable of being coupled to a network transmission medium, a method of analyzing network activity, the method comprising:</p> <p>accessing packets traversing the network, the packets having source and destination addresses of network devices exclusive of the network activity analyzer;</p> <p>filtering the packets to produce packet data by: (a) accessing a predetermined port address; (b) comparing the predetermined port address to source and destination port addresses for a current packet; and (c) retaining the current packet when one of the source and destination port addresses for the current packet matches the</p>	<p>page 1, lines 5-8; page 4, lines 22-25; page 10, line 5- page 12, line 2; page 32, lines 4-17; Figures 1-2 and 12</p> <p>page 4, lines 9-12; page 5, lines 10-18; page 10, line 21 to page 12, line 11; page 12, line 19- page 14, line 7; pg. 12, lines 5-8; page 15, line 15- page 16, line 4; Figures 1-6A; Abstract</p> <p>page 4, lines 9-12; page 5, lines 10-18; page 10, line 21 to page 12, line 11; page 12, line 19- page 14, line 7; pg. 12, lines 5-8; page 15, line 15- page 16, line 4; Figures 1-6A; Abstract</p>

<p>predetermined port address;</p> <p>producing decoded packet data, wherein the decoded packet data includes a plurality of patterns of packets;</p> <p>producing transaction data from the decoded packet data, wherein the transaction data is derived from a time value for identifying a substantially optimal collection of patterns of packets indicative of transaction occurrences; and</p> <p>analyzing the packet data and the transaction data to provide an indication of network usage.</p>	<p>page 4, line 9- page 9, line 2; page 10, line 5- page 11, line 16; page 15, line 15- page 18, line 19; page 18, line 21- page 32, line 3; Figures 1-2 and 6A-11</p> <p>page 4, line 9- page 9, line 2; page 10, line 5- page 11, line 16; page 15, line 15- page 18, line 19; page 18, line 21- page 32, line 3; Figures 1-2 and 6A-11</p> <p>page 4, lines 9-25; page 6, line 12- page 8, line 12; page 10, lines 5-19; page 18, line 21- page 32, line 26; Figures 1-2 and 6A-12</p>
<p>38. (New) For use with a network activity analyzer capable of being coupled to a network transmission medium, a method of analyzing network activity, the method comprising:</p> <p>accessing packets traversing the network, the packets having source and destination addresses of network devices other than an address corresponding to the network activity analyzer;</p> <p>filtering the packets to produce raw packet data by: accessing a predetermined port address; comparing the predetermined port address to source and destination port addresses for a current packet; and retaining the current packet when one of the source and destination port addresses for the current packet matches the predetermined port address;</p>	<p>page 1, lines 5-8; page 4, lines 22-25; page 10, line 5- page 12, line 2; page 32, lines 4-17; Figures 1-2 and 12</p> <p>page 4, lines 9-12; page 5, lines 10-18; page 10, line 21 to page 12, line 11; page 12, line 19- page 14, line 7; pg. 12, lines 5-8; page 15, line 15- page 16, line 4; Figures 1-6A; Abstract</p> <p>page 4, lines 9-12; page 5, lines 10-18; page 10, line 21 to page 12, line 11; page 12, line 19- page 14, line 7; pg. 12, lines 5-8; page 15, line 15- page 16, line 4; Figures 1-6A; Abstract</p>

<p>producing decoded packet data;</p> <p>producing transaction data from the decoded packet data; and</p> <p>analyzing at least one of the decoded packet data and the transaction data to provide an indication of network usage.</p>	<p>page 4, line 9- page 9, line 2; page 10, line 5- page 11, line 16; page 15, line 15- page 18, line 19; page 18, line 21- page 32, line 3; Figures 1-2 and 6A-11</p> <p>page 4, line 9- page 9, line 2; page 10, line 5- page 11, line 16; page 15, line 15- page 18, line 19; page 18, line 21- page 32, line 3; Figures 1-2 and 6A-11</p> <p>page 4, lines 9-25; page 6, line 12- page 8, line 12; page 10, lines 5-19; page 18, line 21- page 32, line 26; Figures 1-2 and 6A-12; claims 1-2 and 4-8</p>
<p>39. (New) For use with a network activity analyzer capable of being coupled to a network transmission medium, a method of analyzing network activity, the method comprising:</p> <p>accessing packets traversing the network, the packets having source and destination addresses of network devices exclusive of the network activity analyzer;</p> <p>filtering the packets to produce packet data;</p> <p>producing decoded packet data by searching in text of the packet data for one or more key words;</p>	<p>page 1, lines 5-8; page 4, lines 22-25; page 10, line 5- page 12, line 2; page 32, lines 4-17; Figures 1-2 and 12</p> <p>page 4, lines 9-12; page 5, lines 10-18; page 10, line 21 to page 12, line 11; page 12, line 19- page 14, line 7; pg. 12, lines 5-8; page 15, line 15- page 16, line 4; Figures 1-6A; Abstract</p> <p>page 4, lines 9-12; page 5, lines 10-18; page 10, line 21 to page 12, line 11; page 12, line 19- page 14, line 7; pg. 12, lines 5-8; page 15, line 15- page 16, line 4; Figures 1-6A; Abstract</p> <p>page 16, line 13- page 18, line 19; Figures 1 and 2, 6A-6D, 7-9A, and 10-11</p>

<p>producing transaction data from the decoded packet data by (a) accessing the decoded packet data; (b) segregating the packets from the decoded packet data into separate transactions between nodes of the network by ordering according to thread and a time interval; (c) sequencing the packets corresponding to each separate transaction by identifying a packet position in a pattern corresponding to each separate transaction; and (d) linking together the data in each separate transaction when the identified positions are determined to produce the transaction data, wherein the transaction data is derived from a time value and identifies a collection of the patterns that is substantially optimal for identifying transaction instances; and</p> <p>analyzing the packet data and the transaction data to provide an indication of network usage.</p>	<p>page 6, line 12- page 8, line 5; page 19, line 12- page 22, line 18; Figures 6C-11</p> <p>page 4, lines 9-25; page 6, line 12- page 8, line 12; page 10, lines 5- 19; page 18, line 21- page 32, line 26; Figures 1-2 and 6A-12</p>
<p>40. (New) For use with a network activity analyzer capable of being coupled to a network transmission medium, a method of analyzing network activity, the method comprising:</p> <p>accessing packets traversing the network, the packets having source and destination addresses other than an address corresponding to the network activity analyzer;</p> <p>filtering the packets to produce raw packet data;</p> <p>producing decoded packet data;</p>	<p>page 1, lines 5-8; page 4, lines 22- 25; page 10, line 5- page 12, line 2; page 32, lines 4-17; Figures 1-2 and 12</p> <p>page 4, lines 9-12; page 5, lines 10-18; page 10, line 21 to page 12, line 11; page 12, line 19- page 14, line 7; pg. 12, lines 5-8; page 15, line 15- page 16, line 4; Figures 1- 6A; Abstract</p> <p>page 4, lines 9-12; page 5, lines 10-18; page 10, line 21 to page 12, line 11; page 12, line 19- page 14, line 7; pg. 12, lines 5-8; page 15, line 15- page 16, line 4; Figures 1- 6A; Abstract</p> <p>page 16, line 13- page 18, line 19;</p>

<p>producing transaction data from the decoded packet data by accessing the decoded packet data; segregating the packets from the decoded packet data into separate transactions between nodes of the network; sequencing the packets corresponding to each separate transaction; and linking together the data in each separate transaction to produce the transaction data; and</p> <p>analyzing at least one of the raw packet data, the decoded packet data, and the transaction data to provide an indication of network usage.</p>	<p>Figures 1 and 2, 6A-6D, 7-9A, and 10-11</p> <p>page 6, line 12- page 8, line 5; page 19, line 12- page 22, line 18; Figures 6C-11</p> <p>page 4, lines 9-25; page 6, line 12- page 8, line 12; page 10, lines 5- 19; page 18, line 21- page 32, line 26; Figures 1-2 and 6A-12; claims 1-2 and 4-8</p>
<p>41. (New) For use with a network activity analyzer capable of being coupled to a network transmission medium, a method of analyzing network activity, the method comprising;</p> <p>accessing packets traversing the network, the packets having source and destination addresses of devices exclusive of the activity analyzer;</p> <p>filtering the packets to produce packet data;</p> <p>producing decoded packet data by searching in text of the packet data for one or more key words;</p> <p>producing transaction data from the</p>	<p>page 1, lines 5-8; page 4, lines 22- 25; page 10, line 5- page 12, line 2; page 32, lines 4-17; Figures 1-2 and 12</p> <p>page 4, lines 9-12; page 5, lines 10-18; page 10, line 21 to page 12, line 11; page 12, line 19- page 14, line 7; pg. 12, lines 5-8; page 15, line 15- page 16, line 4; Figures 1- 6A; Abstract</p> <p>page 4, lines 9-12; page 5, lines 10-18; page 10, line 21 to page 12, line 11; page 12, line 19- page 14, line 7; pg. 12, lines 5-8; page 15, line 15- page 16, line 4; Figures 1- 6A; Abstract</p> <p>page 16, line 13- page 18, line 19; Figures 1 and 2, 6A-6D, 7-9A, and 10-11</p> <p>page 6, line 12- page 8, line 5;</p>

<p>decoded packet data by accessing the decoded packet data; segregating the packets from the decoded packet data into separate transactions between nodes by ordering according to thread and a time interval; sequencing the packets corresponding to each separate transaction by identifying a packet position in a pattern corresponding to each separate transaction; and linking together the data in each separate transaction when the identified positions are determined to produce the transaction data, wherein the transaction data is derived from a time value and identifies a collection of the patterns that is substantially optimal for identifying transaction instances; and</p> <p>producing translated transaction data from the transaction data wherein the translated transaction data includes response data aggregated according to a fixed time interval; and</p> <p>analyzing the packet data and the transaction data to provide an indication of network usage.</p>	<p>page 19, line 12- page 22, line 18; Figures 6C-11</p> <p>page 6, line 12- page 8, line 5; page 19, line 12- page 22, line 18; Figures 6C-11</p> <p>page 32, lines 4-17</p> <p>page 4, line 9- page 9, line 2; page 10, line 5- page 11, line 16; page 15, line 15- page 18, line 19; page 18, line 21- page 32, line 3; Figures 1-2 and 6A-11</p>
<p>42. (New) For use with a network activity analyzer capable of being coupled to a network transmission medium, a method of analyzing network activity, the method comprising;</p> <p>accessing packets traversing the network, the packets having source and destination addresses of devices exclusive of the activity analyzer;</p>	<p>page 1, lines 5-8; page 4, lines 22-25; page 10, line 5- page 12, line 2; page 32, lines 4-17; Figures 1-2 and 12</p> <p>page 4, lines 9-12; page 5, lines 10-18; page 10, line 21 to page 12, line 11; page 12, line 19- page 14, line 7; pg. 12, lines 5-8; page 15, line 15- page 16, line 4; Figures 1-6A; Abstract</p>

<p>filtering the packets to produce packet data;</p> <p>producing decoded packet data;</p> <p>producing transaction data from the decoded packet data by accessing the decoded packet data; segregating the packets from the decoded packet data into separate transactions between nodes; sequencing the packets corresponding to each separate transaction; and linking together the data in each separate transaction;</p> <p>producing translated transaction data from the transaction data; and</p> <p>analyzing the packet data and the transaction data to provide an indication of network usage.</p>	<p>page 4, lines 9-12; page 5, lines 10-18; page 10, line 21 to page 12, line 11; page 12, line 19- page 14, line 7; pg. 12, lines 5-8; page 15, line 15- page 16, line 4; Figures 1-6A; Abstract</p> <p>page 16, line 13- page 18, line 19; Figures 1 and 2, 6A-6D, 7-9A, and 10-11</p> <p>page 6, line 12- page 8, line 5; page 19, line 12- page 22, line 18; Figures 6C-11</p> <p>page 6, line 12- page 8, line 5; page 19, line 12- page 22, line 18; Figures 6C-11</p> <p>page 32, lines 4-17</p> <p>page 4, line 9- page 9, line 2; page 10, line 5- page 11, line 16; page 15, line 15- page 18, line 19; page 18, line 21- page 32, line 3; Figures 1-2 and 6A-11</p>
<p>43. (New) An apparatus for analyzing network activity, the apparatus comprising:</p> <p>means for accessing packets traversing the network, the packets having source and destination addresses of devices exclusive of the network activity analyzer;</p>	<p>page 1, lines 5-8; page 4, lines 22-25; page 10, line 5- page 12, line 2; page 32, lines 4-17; Figures 1-2 and 12</p> <p>page 4, lines 9-12; page 5, lines 10-18; page 10, line 21 to page 12, line 11; page 12, line 19- page 14, line 7; pg. 12, lines 5-8; page 15, line 15- page 16, line 4; Figures 1-</p>

<p>means for filtering the packets to produce packet data, wherein the means for filtering the packets to produce packet data includes routines for retrieving a predetermined address; comparing the predetermined address to the source and destination addresses for a current packet; and retaining the current packet when one of the source and destination addresses for the current packet matches the predetermined address;</p> <p>means for producing decoded packet data, wherein the decoded packet data includes a plurality of patterns of packets;</p> <p>means for producing transaction data from the decoded packet data, wherein the transaction data is derived from a time value for identifying a substantially optimal collection of patterns of packets indicative of transaction instances; and</p> <p>means for analyzing the packet data and the transaction data to provide an indication of network usage.</p>	<p>6A; Abstract</p> <p>page 4, lines 9-12; page 5, lines 10-18; page 10, line 21 to page 12, line 11; page 12, line 19- page 14, line 7; pg. 12, lines 5-8; page 15, line 15- page 16, line 4; Figures 1-6A; Abstract</p> <p>page 4, line 9- page 9, line 2; page 10, line 5- page 11, line 16; page 15, line 15- page 18, line 19; page 18, line 21- page 32, line 3; Figures 1-2 and 6A-11</p> <p>page 4, line 9- page 9, line 2; page 10, line 5- page 11, line 16; page 15, line 15- page 18, line 19; page 18, line 21- page 32, line 3; Figures 1-2 and 6A-11</p> <p>page 4, lines 9-25; page 6, line 12- page 8, line 12; page 10, lines 5-19; page 18, line 21- page 32, line 26; Figures 1-2 and 6A-12</p>
<p>44. (New) An apparatus for analyzing network activity, the apparatus comprising:</p> <p>means for accessing packets traversing the network, the packets having source and destination addresses of devices exclusive of the network activity analyzer;</p>	<p>page 1, lines 5-8; page 4, lines 22-25; page 10, line 5- page 12, line 2; page 32, lines 4-17; Figures 1-2 and 12</p> <p>page 4, lines 9-12; page 5, lines 10-18; page 10, line 21 to page 12, line 11; page 12, line 19- page 14, line 7; pg. 12, lines 5-8; page 15, line 15- page 16, line 4; Figures 1-6A; Abstract</p>

<p>means for filtering the packets to produce packet data, wherein the means for filtering the packets to produce packet data includes routines for retrieving a predetermined address; comparing the predetermined address to the source and destination addresses for a current packet; and retaining the current packet when one of the source and destination addresses for the current packet matches the predetermined address;</p> <p>means for producing decoded packet data;</p> <p>means for producing transaction data from the decoded packet data; and</p> <p>means for analyzing the packet data and the transaction data to provide an indication of network usage.</p>	<p>page 4, lines 9-12; page 5, lines 10-18; page 10, line 21 to page 12, line 11; page 12, line 19- page 14, line 7; pg. 12, lines 5-8; page 15, line 15- page 16, line 4; Figures 1-6A; Abstract</p> <p>page 4, line 9- page 9, line 2; page 10, line 5- page 11, line 16; page 15, line 15- page 18, line 19; page 18, line 21- page 32, line 3; Figures 1-2 and 6A-11</p> <p>page 4, line 9- page 9, line 2; page 10, line 5- page 11, line 16; page 15, line 15- page 18, line 19; page 18, line 21- page 32, line 3; Figures 1-2 and 6A-11</p> <p>page 4, lines 9-25; page 6, line 12- page 8, line 12; page 10, lines 5-19; page 18, line 21- page 32, line 26; Figures 1-2 and 6A-12</p>
<p>45. (New) An apparatus for analyzing network activity, the apparatus comprising:</p> <p>means for accessing packets traversing the network, the packets having source and destination addresses for network devices exclusive of the network activity analyzer;</p>	<p>page 1, lines 5-8; page 4, lines 22-25; page 10, line 5- page 12, line 2; page 32, lines 4-17; Figures 1-2 and 12</p> <p>page 4, lines 9-12; page 5, lines 10-18; page 10, line 21 to page 12, line 11; page 12, line 19- page 14, line 7; pg. 12, lines 5-8; page 15, line 15- page 16, line 4; Figures 1-6A; Abstract</p>

<p>means for filtering the packets to produce packet data, wherein the means for filtering the packets to produce packet data includes routines for accessing a predetermined port address; comparing the predetermined port address to a source port address for a current packet; comparing the predetermined port address to a destination port address for the current packet; and retaining the current packet when one of the source and destination port addresses for the current packet matches the predetermined port address;</p> <p>means for producing decoded packet data, wherein the decoded packet data includes a plurality of patterns of packets;</p> <p>means for producing transaction data from the decoded packet data, wherein the transaction data is derived from a time value for identifying a substantially optimal collection of packets indicative of transaction occurrences; and</p> <p>means for analyzing the packet data and the transaction data to provide an indication of network usage.</p>	<p>page 4, lines 9-12; page 5, lines 10-18; page 10, line 21 to page 12, line 11; page 12, line 19- page 14, line 7; pg. 12, lines 5-8; page 15, line 15- page 16, line 4; Figures 1-6A; Abstract</p> <p>page 4, line 9- page 9, line 2; page 10, line 5- page 11, line 16; page 15, line 15- page 18, line 19; page 18, line 21- page 32, line 3; Figures 1-2 and 6A-11</p> <p>page 4, line 9- page 9, line 2; page 10, line 5- page 11, line 16; page 15, line 15- page 18, line 19; page 18, line 21- page 32, line 3; Figures 1-2 and 6A-11</p> <p>page 4, lines 9-25; page 6, line 12- page 8, line 12; page 10, lines 5-19; page 18, line 21- page 32, line 26; Figures 1-2 and 6A-12</p>
<p>46. (New) An apparatus for analyzing network activity, the apparatus comprising:</p> <p>means for accessing packets traversing the network, the packets having source and destination addresses for network devices other than an address corresponding to the network activity analyzer;</p>	<p>page 1, lines 5-8; page 4, lines 22-25; page 10, line 5- page 12, line 2; page 32, lines 4-17; Figures 1-2 and 12</p> <p>page 4, lines 9-12; page 5, lines 10-18; page 10, line 21 to page 12, line 11; page 12, line 19- page 14, line 7; pg. 12, lines 5-8; page 15, line 15- page 16, line 4; Figures 1-6A; Abstract</p>

<p>means for filtering the packets to produce raw packet data, wherein the means for filtering the packets to produce raw packet data includes routines for retrieving a predetermined port address; comparing the predetermined port address to a source port address for a current packet; comparing the predetermined port address to a destination port address for the current packet; and retaining the current packet when one of the source and destination port addresses for the current packet matches the predetermined port address;</p> <p>means for producing decoded packet data;</p> <p>means for producing transaction data from the decoded packet data; and</p> <p>means for analyzing at least one of the decoded packet data and the transaction data to provide an indication of network usage.</p>	<p>page 4, lines 9-12; page 5, lines 10-18; page 10, line 21 to page 12, line 11; page 12, line 19- page 14, line 7; pg. 12, lines 5-8; page 15, line 15- page 16, line 4; Figures 1-6A; Abstract</p> <p>page 4, line 9- page 9, line 2; page 10, line 5- page 11, line 16; page 15, line 15- page 18, line 19; page 18, line 21- page 32, line 3; Figures 1-2 and 6A-11</p> <p>page 4, line 9- page 9, line 2; page 10, line 5- page 11, line 16; page 15, line 15- page 18, line 19; page 18, line 21- page 32, line 3; Figures 1-2 and 6A-11</p> <p>page 4, lines 9-25; page 6, line 12- page 8, line 12; page 10, lines 5-19; page 18, line 21- page 32, line 26; Figures 1-2 and 6A-12; claims 1-2 and 4-8</p>
<p>47. (New) An apparatus for analyzing network activity, the apparatus comprising;</p> <p>means for accessing packets traversing the network, the packets having source and destination addresses other than an address corresponding to the network activity analyzer;</p>	<p>page 1, lines 5-8; page 4, lines 22-25; page 10, line 5- page 12, line 2; page 32, lines 4-17; Figures 1-2 and 12</p> <p>page 4, lines 9-12; page 5, lines 10-18; page 10, line 21 to page 12, line 11; page 12, line 19- page 14, line 7; pg. 12, lines 5-8; page 15, line 15- page 16, line 4; Figures 1-6A; Abstract</p>

<p>means for filtering the packets to produce packet data;</p> <p>means for producing decoded packet data by searching in text of the packet data for one or more key words;</p> <p>means for producing transaction data from the decoded packet data, wherein the means for producing transaction data includes routines for accessing the decoded packet data; segregating the packets from the decoded packet data into separate transactions between nodes by ordering according to thread and a time interval; sequencing the packets corresponding to each separate transaction by identifying a position in a pattern corresponding to each separate transaction; and linking together the data in each separate transaction when the identified positions are determined to produce the transaction, wherein the transaction data is derived from a time value and identifies a collection of the patterns that is substantially optimal for identifying transaction instances; and</p> <p>means for analyzing the packet data, and the transaction data to provide an indication of network usage.</p>	<p>page 4, lines 9-12; page 5, lines 10-18; page 10, line 21 to page 12, line 11; page 12, line 19- page 14, line 7; pg. 12, lines 5-8; page 15, line 15- page 16, line 4; Figures 1-6A; Abstract</p> <p>page 16, line 13- page 18, line 19; Figures 1 and 2, 6A-6D, 7-9A, and 10-11</p> <p>page 6, line 12- page 8, line 5; page 19, line 12- page 22, line 18; Figures 6C-11</p> <p>page 4, lines 9-25; page 6, line 12- page 8, line 12; page 10, lines 5-19; page 18, line 21- page 32, line 26; Figures 1-2 and 6A-12</p>
<p>48. (New) An apparatus for analyzing network activity, the apparatus comprising;</p> <p>means for accessing packets traversing the network, the packets having source and destination addresses other than an address corresponding to the network activity analyzer;</p>	<p>page 1, lines 5-8; page 4, lines 22-25; page 10, line 5- page 12, line 2; page 32, lines 4-17; Figures 1-2 and 12</p> <p>page 4, lines 9-12; page 5, lines 10-18; page 10, line 21 to page 12, line 11; page 12, line 19- page 14, line 7; pg. 12, lines 5-8; page 15,</p>

means for filtering the packets to produce raw packet data;	line 15- page 16, line 4; Figures 1-6A; Abstract
means for producing decoded packet data;	page 4, lines 9-12; page 5, lines 10-18; page 10, line 21 to page 12, line 11; page 12, line 19- page 14, line 7; pg. 12, lines 5-8; page 15, line 15- page 16, line 4; Figures 1-6A; Abstract
means for producing transaction data from the decoded packet data, wherein the means for producing transaction data includes routines for accessing the decoded packet data; segregating the packets from the decoded packet data into separate transactions between nodes; sequencing the packets corresponding to each separate transaction; and linking together the data in each separate transaction to produce the transaction data; and	page 16, line 13- page 18, line 19; Figures 1 and 2, 6A-6D, 7-9A, and 10-11
means for analyzing the decoded packet data and the transaction data to provide an indication of network usage.	page 6, line 12- page 8, line 5; page 19, line 12- page 22, line 18; Figures 6C-11
	page 4, lines 9-25; page 6, line 12- page 8, line 12; page 10, lines 5-19; page 18, line 21- page 32, line 26; Figures 1-2 and 6A-12

Pursuant to 37 C.F.R. §1.607(a) 1, Applicant presents the following proposed count 1:

1. An apparatus for analyzing network activity, the apparatus comprising:
a packet capturing module, for accessing packets traversing a network, the packets having source and destination addresses other than an address corresponding to the apparatus, and for filtering the packets to produce raw packet data, wherein the packet capturing module

produces the raw packet data by accessing a predetermined address, comparing the predetermined address to the network source address for a current packet, comparing the predetermined address to a network destination address for the current packet, and retaining the current packet where one of the network source and destination addresses for the current packet matches the predetermined address;

a packet analyzing module, in communication with the packet capturing module, for producing decoded packet data and for producing transaction data from the decoded packet data; and

a data management module, in communication with the packet capturing module and the packet analyzing module, for analyzing at least one of the raw packet data, the decoded packet data and the transaction data to provide an indication of network usage.

Applicants submit that patent claim 1 of U.S. Patent No. 5,787,253 and Applicants Claims 29 and 30 substantially correspond to proposed Count 1.

Pursuant to 37 C.F.R. §1.607(a) 1, Applicant presents the following proposed count 2:

2. An apparatus for analyzing network activity, the apparatus comprising:

a packet capturing module, for accessing packets traversing a network, the packets having source and destination addresses other than an address corresponding to the apparatus, and for filtering the packets to produce raw packet data, wherein the packet capturing module produces the raw packet data by accessing a predetermined port address, comparing the predetermined port address to a source port address for a current packet, comparing the predetermined port address to a destination port address for the current packet, and retaining

the current packet where one of the source and destination port addresses for the current packet matches the predetermined port address;

a packet analyzing module, in communication with the packet capturing module, for producing decoded packet data and for producing transaction data from the decoded packet data; and

a data management module, in communication with the packet capturing module and the packet analyzing module, for analyzing at least one of the raw packet data, the decoded packet data and the transaction data to provide an indication of network usage.

Applicants submit that patent claim 2 of U.S. Patent No. 5,787,253 and Applicants Claims 31 and 32 substantially correspond to proposed Count 2.

Pursuant to 37 C.F.R. §1.607(a) 1, Applicant presents the following proposed count 3:

3. An apparatus for analyzing network activity, the apparatus comprising:

a packet capturing module, for accessing packets traversing a network, the packets having source and destination addresses other than an address corresponding to the apparatus, and for filtering the packets to produce raw packet data;

a packet analyzing module, in communication with the packet capturing module, for producing decoded packet data; and for producing transaction data from the decoded packet data, the packet analyzing module comprising: a packet decoder, for accessing the raw packet data and producing the decoded packet data; and a decoded packet recompiler, in communication with the packet decoder, for accessing the decoded packet data, segregating the packets from the decoded packet data into separate transactions between

nodes, sequencing the packets corresponding to each separate transaction, and linking together the data in each separate transaction to produce the transaction data; and

a data management module, in communication with the packet capturing module and the packet analyzing module, for analyzing at least one of the raw packet data, the decoded packet data and the transaction data to provide an indication of network usage.

Applicants submit that patent claim 3 of U.S. Patent No. 5,787,253 and Applicants Claims 33 and 34 substantially correspond to proposed Count 3.

Pursuant to 37 C.F.R. §1.607(a) 1, Applicant presents the following proposed count 4:

4. For use with a network activity analyzer capable of being coupled to a network transmission medium, a method of analyzing network activity, the method comprising:

accessing packets traversing the network, the packets having source and destination addresses other than an address corresponding to the network activity analyzer;

filtering the packets to produce raw packet data by: accessing a predetermined address; comparing the predetermined address to a source address for a current packet; comparing the predetermined address to a destination address for the current packet; and retaining the current packet where one of the source and destination addresses for the current packet matches the predetermined address;

producing decoded packet data;

producing transaction data from the decoded packet data ; and

analyzing at least one of the raw packet data, the decoded packet data and the transaction data to provide an indication of network usage.

Applicants submit that patent claim 10 of U.S. Patent No. 5,787,253 and Applicants Claims 35 and 36 substantially correspond to proposed Count 4.

Pursuant to 37 C.F.R. §1.607(a) 1, Applicant presents the following proposed count 5:

5. For use with a network activity analyzer capable of being coupled to a network transmission medium, a method of analyzing network activity, the method comprising:

accessing packets traversing the network, the packets having source and destination addresses of network devices other than an address corresponding to the network activity analyzer;

filtering the packets to produce raw packet data by: accessing a predetermined port address; comparing the predetermined port address to a source port address for a current packet; comparing the predetermined port address to a destination port address for the current packet; and retaining the current packet where one of the source and destination port addresses for the current packet matches the predetermined port address;

producing decoded packet data;

producing transaction data from the decoded packet data; and

analyzing at least one of the raw packet data, the decoded packet data and the transaction data to provide an indication of network usage.

Applicants submit that patent claim 11 of U.S. Patent No. 5,787,253 and Applicants Claims 37 and 38 substantially correspond to proposed Count 5.

Pursuant to 37 C.F.R. §1.607(a) 1, Applicant presents the following proposed count 6:

6. For use with a network activity analyzer capable of being coupled to a network transmission medium, a method of analyzing network activity, the method comprising:

accessing the packets traversing the network, the packets having source and destination addresses other than an address corresponding to the network activity analyzer;

filtering the packets to produce raw packet data;

producing decoded packet data;

producing transaction data from the decoded packet data by: accessing the decoded packet data; segregating the packets from the decoded packet data into separate transactions between nodes of the network; sequencing the packets corresponding to each separate transaction, and linking together the data in each separate transaction to produce the transaction data; and

analyzing at least one of the raw packet data, the decoded packet data and the transaction data to provide an indication of network usage.

Applicants submit that patent claim 12 of U.S. Patent No. 5,787,253 and Applicants Claims 39 and 40 substantially correspond to proposed Count 6.

Pursuant to 37 C.F.R. §1.607(a) 1, Applicant presents the following proposed count 7:

7. For use with a network activity analyzer capable of being coupled to a network transmission medium, a method of analyzing network activity, the method comprising:

accessing packets traversing the network, the packets having source and destination addresses other than an address corresponding to the activity analyzer;

filtering the packets to produce packet data;

producing decoded packet data;

producing transaction data from the decoded packet data by accessing the decoded packet data; segregating the packets from the decoded packet data into separate transactions between nodes; sequencing the packets corresponding to each separate transaction; and linking together the data in each separate transaction to produce the transaction data; and

producing translated transaction data from the transaction data; and

analyzing at least one of the raw packet data, the decoded packet data, the transaction data, and the translated transaction data to provide an indication of network usage.

Applicants submit that patent claim 14 of U.S. Patent No. 5,787,253 and Applicants Claims 41 and 42 substantially correspond to proposed Count 7.

Pursuant to 37 C.F.R. §1.607(a) 1, Applicant presents the following proposed count 8:

8. An apparatus for analyzing network activity, the apparatus comprising:

means for accessing the packets traversing the network, the packets having source and destination addresses other than an address corresponding to the network activity analyzer;

means for filtering the packets to produce packet data, wherein the means for filtering the packets to produce raw packet data includes routines for accessing a

predetermined address; comparing the predetermined address to a source address for a current packet; comparing the predetermined address to a destination address for the current packet; and retaining the current packet where one of the source and destination addresses for the current packet matches the predetermined address;

means for producing decoded packet data;

means for producing transaction data from the decoded packet data; and

means for analyzing at least one of the raw packet data, the decoded packet data and the transaction data to provide an indication of network usage.

Applicants submit that patent claim 20 of U.S. Patent No. 5,787,253 and Applicants Claims 43 and 44 substantially correspond to proposed Count 8.

Pursuant to 37 C.F.R. §1.607(a) 1, Applicant presents the following proposed count 9:

9. An apparatus for analyzing network activity, the apparatus comprising:

means for accessing packets traversing the network, the packets having source and destination addresses other than an address corresponding to the network activity analyzer;

means for filtering the packets to produce raw packet data, wherein the means for filtering the packets to produce raw packet data includes routines for accessing a predetermined port address; comparing the predetermined port address to a source port address for a current packet; comparing the predetermined port address to a destination port address for the current packet; and retaining the current packet where one of the source and destination port addresses for the current packet matches the predetermined port address;

means for producing decoded packet data;

means for producing transaction data from the decoded packet data; and
means for analyzing at least one of the raw packet data, the decoded packet data
and the transaction data to provide an indication of network usage.

Applicants submit that patent claim 21 of U.S. Patent No. 5,787,253 and
Applicants Claims 45 and 46 substantially correspond to proposed Count 9.

Pursuant to 37 C.F.R. §1.607(a) 1, Applicant presents the following proposed
count 10:

10. An apparatus for analyzing network activity, the apparatus comprising:
means for accessing packets traversing the network, the packets having source and
destination addresses other than an address corresponding to the network activity analyzer;
means for filtering the packets to produce raw packet data;
means for producing decoded packet data;
means for producing transaction data from the decoded packet data, wherein the
means for producing transaction data includes routines for accessing the decoded packet data;
segregating the packets from the decoded packet data into separate transactions between
nodes; sequencing the packets corresponding to each separate transaction; and linking
together the data in each separate transaction to produce the transaction data; and
means for analyzing at least one of the raw packet data, the decoded packet data
and the transaction data to provide an indication of network usage.


Applicants submit that patent claim 22 of U.S. Patent No. 5,787,253 and
Applicants Claims 47 and 48 substantially correspond to proposed Count 10.

As disclosed in the present application, newly presented Claims 29-48 are patentable over U.S. Patent No. 5,787,253 because the subject matter is entitled to a priority date of at least August 10, 1995, which is prior to May 28, 1996, the filing date for U.S. Patent No. 5,787,253.

Applicant respectfully directs the Examiner to consider related, pending applications to U.S. Patent No. 5,787,253, to McCreery et al. In an Amendment mailed on November 18, 1997, McCreery et al. canceled independent claims 3, 14 and 26 to pursue their subject matter in a continuation application. Applicant has reviewed these claims and believes that the claims are directed to the same patentable invention as the present invention.

Respectfully submitted,

SHERIDAN ROSS P.C.

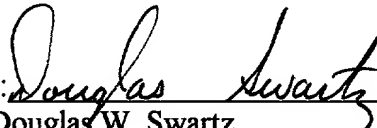By: 
Douglas W. Swartz
Registration No. 37,739
1700 Lincoln Street
Suite 3500
Denver, Colorado 80203
(303) 863-9700

Date: July 28, 1999
J:\32431-2\41-11-1\AMD-Preliminary Amendment.wpd

RESPONSE TIME MEASUREMENT APPARATUS AND METHOD

FIELD OF THE INVENTION

5 The present invention is directed generally to the measurement of response time in computer applications and specifically to the use of non-intrusive devices to measure response time in multi-tiered computer networks.

BACKGROUND OF THE INVENTION

10 Multi-tiered computer networks are widely used to provide one or more users with a wide variety of information and computer resources. In multi-tiered computer networks, client computers (e.g., users) interact with server computers to
15 perform an application which is partitioned into one or more transactions. An application is a group of meaningful transactions, and a transaction is a unit of meaningful work as perceived by the user. A transaction is typically a collection of service requests, with the service request
20 typically being a collection of service packets. A service packet is simply an item of information, or a message, communicated between computers. In the course of performing a transaction, the client computer may request one or more of the server computers to transfer service packets containing
25 data to the client computer or provide service packets containing data to the server computer(s) to permit the server computer(s) to process the request. The server computers can in turn request the services of other server computers in

connection with the data transfer request from the client computer.

Performance monitoring of the network is important to ascertain periods of significant transaction user delays and user productivity. Performance monitoring generally seeks to measure the response time for a transaction or application. The response time is the time required for the servers and network to perform the transaction or application. Statistical analysis can be performed on the response times to facilitate analysis of servers and network performance.

Two methods are commonly used to monitor network performance and provide response times. Intrusive/invasive monitoring techniques alter the software code on the client computer to include a marker command. The marker commands inform a listening device of transmission of the initial service request packet to initiate timing measurement and receipt of the final results or acknowledgement packet to cease timing measurement. Non-intrusive/non-invasive monitoring techniques, in contrast, typically do not alter the software code. Rather, a probe is inserted into a communication line between the client and server computers to monitor the delays between transmission of individual packets between the client and server computers to provide a rough estimate of response time.

Intrusive/invasive and non-intrusive/non-invasive techniques each have a number of drawbacks. In the case of

response time for a transaction or an application using non-intrusive/non-invasive techniques.

There is a need for an apparatus and method for measuring the response time for a transaction or an application that is
5 able to match individual service packets with the corresponding transaction or application.

SUMMARY OF THE INVENTION

The present invention addresses these and other needs by
10 providing in one aspect a method for identifying a transaction corresponding to a plurality of service packets communicated between a source node and a destination node. The method includes the steps: (i) providing a communications data set including a plurality of service packets and information
15 relating to the order in which the service packets are communicated on a communications line between the source and destination nodes and (ii) comparing the communications data set against a pattern characterization data set to determine whether at least a portion of the plurality of service packets
20 are part of the transaction. The pattern characterization data set includes information relating to a predetermined ordering of service packets that comprise the transaction. The method is amenable to non-intrusive/non-invasive measuring techniques and can provide near real-time response time
25 information, even for multi-tiered computer networks.

5 The invention is based in part upon the recognition that the service packets communicated along the communications line constitute patterns of service requests that occur repeatedly in an operational environment. These service request patterns correspond to different transaction types. It has been discovered that these service request patterns can be determined using signal processing techniques. Once identified, the start and stop times for the pattern can be determined to provide a response time for the transaction.

10 A probe can be used to read the packets on a real-time basis from the communications line with the packets being recorded along with a received time (e.g., the time at which the packet was read by the probe) in the communications data set.

15 The packets can be filtered based on a node address and/or port number. In a preferred embodiment, the service packets correspond to a plurality of threads and the packets are sorted by thread.

20 The service request packets can be identified by their contents and destination. The service result packets can then be correlated with the corresponding service request packets. The start and stop times for the service request can then be determined.

25 After identification of the service requests corresponding to the transaction, the response time for the

transaction can be determined using the various start and stop times for the service requests.

In another aspect of the present invention, a non-intrusive system is provided for identifying a transaction comprising a plurality of service packets communicated between source and destination nodes. The system includes: (i) a device for recording a plurality of service packets communicated on the communications line and (ii) a device, in communication with the recording device, for identifying a transaction that includes at least a portion of the plurality of packets.

In yet another aspect, the present invention provides a method for identifying a transaction comprising a plurality of service packets communicated between source and destination nodes that includes the steps: (i) providing a communications data set including (a) a plurality of service packets corresponding to a plurality of service requests and (b) the start and stop times for each service request and (ii) comparing the time interval between the stop of a first service request and the start of a second service request against a predetermined value for the time interval to identify a sequence of service requests that comprise a transaction.

The comparing step can be performed in several iterations where the time interval is varied to select an optimal

66240-1000000

predetermined value for the time interval between service requests to yield a substantially optimal listing of service request sequences as a possible transaction. The resultant number of transaction service request patterns are then used to determine an optimal value for the predetermined time interval. For a range of time intervals the number of transaction service request patterns remains constant. The optimal value for the predetermined time interval is the midpoint of this range of values. By way of example, after identifying a service request sequence(s) using the predetermined values, the method can further include selecting a second predetermined value, comparing the time intervals, between service requests, against the second predetermined value to identify a second sequence(s) of service requests corresponding to a second transaction(s), and recording the second sequence(s) of service requests and the number of occurrences of each of the second sequence(s) in a second data set. The method next selecting a third predetermined value (which is the optimal predetermined value) based on the relationship between (i) the number of the sequence(s) of service requests and the predetermined value and (ii) the number of the second sequence(s) of service requests and the second predetermined value. The method then comprises as before the time interval between service requests against the third predetermined value for the time interval to identify a third sequence(s) of service requests corresponding to a third

transaction(s). The service request sequence for the third transaction is deemed to be the optimal sequence. The third sequence is then compared against the communications data set to determine whether at least a portion of the plurality of service requests correspond to one or more transaction(s).

The method produces the pattern characterization data set referred to above. The pattern characterization data set lists a plurality of service request sequences for comparison against the service requests from the comparing step. This additional comparison step is to determine if the service requests as ordered by time are contained in the pattern characterization data set.

In a final aspect, the present invention includes a non-intrusive system for determining transaction level activity between a source and destination node. The system includes: (i) a device for recording a plurality of service packets communicated on a communications line between source and destination nodes and (ii) a device for determining the number of transactions in communication with the recording device. The service packets relate to a number of transactions and the recording device provides the communications data set.

In one embodiment, the determining device is a device for comparing the time interval between the stop time of a first service request and the start time of a second service request against a predetermined value for the time interval to

identify a sequence of service requests in the communications data set that together comprise a transaction.

BRIEF DESCRIPTION OF THE DRAWINGS

5 Fig. 1 depicts an embodiment of the present invention connected to a computer network;

 Fig. 2 depicts another embodiment of the present invention connected to a multi-tiered computer network;

 Fig. 3 depicts a service packet;

10 Fig. 4 depicts an example of the service packets in a service request;

 Fig. 5 depicts the response time for a transaction involving a number of service requests;

15 Figs. 6A-E depict a first embodiment of a method according to the present invention for determining response time;

 Fig. 7 depicts the interactions of service requests in the pattern finding and matching steps;

20 Fig. 8 is a plot of the predetermined time value against the number of transactions discovered;

 Figs. 9A-B depict a second embodiment of a method according to the present invention for determining response time;

25 Figs. 10-11 depict the interactions of service request in the pattern finding and matching steps; and

Fig. 12 is a graphical presentation of CPU utilization versus response time for a transaction.

DETAILED DESCRIPTION

5 The present invention is directed to a method and apparatus for measuring response times for a transaction or an application using non-intrusive/non-invasive techniques. As noted above, non-intrusive/non-invasive monitoring techniques do not interrupt the software code to measure response time.

10 Rather, such techniques monitor the network communications between the client computer and the various server computers. Unlike existing performance monitoring methods, the method of the present invention matches selected service packets and associated start and stop time information for the service

15 packets with the corresponding transaction or application. After the matching step, the method provides response times for the transaction or application. The present invention is useful not only for performance monitoring but also for billing and monitoring of service level agreement compliance.

20 The Apparatus Configuration

 The apparatus configuration according to the present invention is depicted in Figs. 1 and 2. Referring to Fig. 1, the simplest single network segment is depicted. In the network, a recording device or probe 20 is connected to a

25 communication line or busline 24 between a client computer 28 and a server computer 32. The recording device 20 selects

service packets transmitted along the communication line 24 and provides the service packet and the time at which the service packet was received by the recording device 20 to the monitoring computer 36 for analysis. Fig. 2 depicts a more complex multi-tiered architecture with multiple network segments. Recording devices 20 a,b are connected via a communications device 22, such as a modem, to the communication lines 24a,b between the network segments 26a,b. The network segments include client computer 28 and server computers 32a,b c,d and the communication lines 24 a, b. As can be seen from these figures, the present invention does not measure response time within the various client and server computers as in intrusive/invasive monitoring techniques, but measures response time by monitoring the network communications on the communications line between the client computer and the various server computers.

The number and locations of the recording device(s) 20 in a multi-tiered computer network depend upon the application. Typically, a recording device 20 will be located on any portion of the communication line 24 that is between the points of access of the drivers of client or server computers to the communications line 24. In this manner, all of the service packets communicated on the communications line 24 will be read by a recording device 20 and an accurate determination of the response time for a transaction or

application involving multiple client and/or server computers can be made.

The text of a typical service packet communicated between computers in a multi-tiered computer network is depicted in Fig. 3. As can be seen from Fig. 3, a service packet typically includes a node address 40, which identifies the source and destination of the service packet, a port number 44, and additional information 48. Depending upon the application, the service packet can have additional information, such as a database request, file system request and object broker request.

There are generally two types of service packets, namely service request and service results packets. Service request packets request a server computer to perform a specific action. Service results packets are service packets generated in response to the service request packet. Service results packets can contain a variety of information including the information requested by the service request packet.

To illustrate the use of two types of service packets in a service request, an example of a service request involving numerous service packets is depicted in Fig. 4. A typical service request begins with the service request packet 56 (which can be multiple service packets) issued by, for example, a client computer to a server computer. The server computer then transmits a service request acknowledgement packet 60 to the client computer and begins processing the

request. When the server computer has completed processing the service request, the server computer sends a service results notification packet 64 to the client computer that the server computer is ready to send the service request's data to the client computer. The client computer then transmits a service results transmission packet 68 requesting transmission of the data. The service computer commences transmitting service results packets 72. The service results completion packet 76 notifies the client computer that the final service results packet has been transmitted, and the service results acknowledgement packet 80 notifies the server computer that the information has been received. The response time to complete the service request is the difference between the received time for the service request packet 56 and the received time for the service completion acknowledgment packet 80.

To further illustrate the response time for a transaction, an example of a transaction involving numerous service requests will be described with reference to Figs. 2 and 5. A type "A" transaction executed on the client computer 28 makes service request 1 of server computer 32a and service request 2 of server computer 32b. To complete service request 1, server computer 32b makes service request 3 of server computer 32c. When service request 1 is completed, the type "A" transaction makes service requests 4 and 5 of server computer 32d and service type 6 (e.g., service request 6) of

server computer 32c. The pattern of service requests to the various server computers identifies the transaction as a type "A" transaction. The response time for the type "A" transaction is measured from the start time of service requests 1 and 2 to the stop time of service request 5. Thus, the transaction response time is simply a collection of individual service request response times.

The Filtering of Service Packets

Figs. 6A-E provide a flow schematic depicting a first embodiment of a performance monitoring method according to the present invention. The method collects selected service packets from the recording device(s) and filters the selected service packets to form a communications data set. The network communications are filtered to yield only those service packets relevant to the application(s) of interest. As will be appreciated, it is possible that multiple applications on the same client computer request the same type of services from a specific server computer. It is also possible that a service provider may migrate from one server computer to another server computer of the same type.

The first embodiment is based on the assumption that the packets of a given transaction are located on only one thread. A given thread can, however, have packets from more than one transaction. A second embodiment of the present invention is discussed below for an application in which a given transaction occurs on more than one thread.

668220-100E9E60

As used herein, a thread is a specific identifiable connection or session between a service requestor node and a service provider node. A thread is preferably identified such that it can have only one service request on it at a given point in time. As will be appreciated, in some applications the node address is not an adequate identifier of each thread because there can be multiple sessions for a given node address. In such cases, the connection or session identification information is used to further identify the thread to which the service packet is to be dispatched. A thread can be either a user thread, which is a thread that is uniquely identifiable to a specific client computer, or a shared thread, which is a thread shared among multiple user requests.

Referring to Fig. 6A, one or more recording devices 20 first read in command box 100 one or more service packets from the communications line 24. Based on the node address or other thread identification information, a recording device 20 determines if the service packet pertains to the client computer(s) and/or server computer(s) (e.g., threads) of interest. If so, the service packet is recorded and the time the service packet was read by the recording device 20 (e.g., received time); otherwise, no record is made of the service packet. If one were interested in a particular subset of service requests, the recording device 20 could filter based not only on the node address or other thread identification

information but also on the port number. The port number is useful for filtering if the application is configured such that there is only one service request on a port at a given point in time.

5 In a command box 104, the service packet is recorded in a communications data set by being dispatched to an appropriate thread data set. The communications data set contains the service packets read by all of the recording devices organized by the thread. There is a thread data set
10 for each thread. In most applications, a plurality of thread data sets in the communications data set are active at any point in time.

The service packet is next examined in decision box 108 to determine if it is a service request packet. This is
15 accomplished by searching in the text of the service packet for a key word(s) and/or symbol(s) unique to a service request packet; that is, the words and/or symbols are not used in service results packets. The words and/or symbols used in the search can be specific to a given transaction and/or
20 application.

If the service packet is an initial service request packet, the subsequent service packets are read in command box 112 to identify in decision box 116 the service completion packet. The service completion packet is the final service
25 results packet in a service request. As noted above, there will only be one set of service packets for a specific service

66220" T00E9E60

request that is serial on the thread at a particular moment in time. The set of service packets for a given service request comprise a service data subset. Accordingly, the matching of the service request packet with the corresponding service results packets is a relatively straightforward process.

There are two methods to identify the service completion packet. In one method, the text in each service results packet is searched for key word(s) and/or symbol(s) only associated with one or more of the service results packets.

In the other method, the service packet having the latest received time is assumed to be the service completion packet. In other words, the last service packet on the thread before the immediately succeeding service request packet is assumed to be the service completion packet. The last packet on the thread can be sent by either the client or server computer. Which of the two methods is preferred in a specific case depends upon the application.

After the service request and service completion packets are identified in decision box 116, the start and stop times for the service request are recorded in command box 120 in the communications data set along with the thread identification information and a service request identifier and possibly recording device location. The start time is the received time for the service request packet, and the stop time is the received time for the service completion packet. The service request identifier can be any suitable means for identifying

the type of service to which the service request pertains. By way of example, the service request identifier can be a command or a portion thereof, especially in data processing applications. The communications data set can include other
5 information, including the location of the recording device 20 on the communications line 24, network type and other recording information.

The preceding steps are repeated on a packet-by-packet basis for the service packets communicated along a section of
10 the communications line 24 over a selected time period. The time period can be discrete or continuous. In either case, the communications data set is, after an appropriate time interval, subjected to the steps discussed below to identify response time.

15 For service packets having encrypted or compressed data, it is typically necessary to know or determine the compression algorithm before applying the filtering steps. Additional steps may therefore be required to unencrypt or uncompress the packets.

20 The Transaction Pattern Finding Steps

In a series of transaction pattern finding steps discussed in detail below, the monitoring computer 36 analyzes the communications data set to identify a sequence of service requests that together comprise a possible transaction
25 pattern. Generally, the monitoring computer 36 identifies the service request sequence by comparing the time interval

between the stop time of a first service request and the start time of a succeeding service request against a predetermined value for the time interval. If the time interval is less than or equal to the predetermined value, the service requests
5 are deemed to be part of the same transaction and if the time interval is more than the predetermined value, the service requests are deemed to be part of separate transactions. Accordingly, the selected time interval is selected based on the maximum projected time interval between adjacent service
10 requests for the two service requests to be considered part of the same transaction.

Referring to Fig. 6B to initiate the transaction pattern finding steps, a selected time interval can be increased or decreased by a selected time increment in decision box 124.
15 If the selected time interval is at the upper or lower limit of the desired range of time interval values, processing is terminated. The selected time interval and incremental increases or decreases thereof are discussed in greater detail below. As will be appreciated, a smaller selected time
20 interval yields a smaller number of possible transaction patterns than a larger selected time interval.

After selection of the appropriate selected time interval, the monitoring computer 36 in command box 128 opens for all of the selected time intervals a service request file,
25 to contain information generated in the succeeding steps. As

discussed below, the service request file will contain the service requests sorted by thread and selected time interval.

Returning to Fig. 6B, the monitoring computer next reads in command box 132 a service request from the communications data set and, in decision box 136, determines if all of the service requests in the communications data set have been read. If so, the monitoring computer goes to decision box 124. If not, the monitoring computer dispatches the service request in command box 144 to the appropriate thread to form a thread data set with one thread data set existing for each thread. As the various service requests are read from the communications data set and dispatched to the thread data sets for each selected time interval, a collection of service requests can form in each thread data set. The service requests in each thread data subset are ordered by their respective start and stop times. Thus, as noted above, each of the service requests in the collection is separated from an adjacent service request by a time interval. Command boxes 132, 144 are repeated until all of the service requests in the communications data set are sorted by thread for each selected time interval.

After the computer in decision box 124 determines the all selected time intervals have been analyzed, the computer proceeds to command box 140. In command box 140, the service requests from the communications data set are all received into the various thread data sets. As will be appreciated,

the ensuing steps in Fig. 6C are performed for each selected time interval in the service request file.

The service requests in each thread data set are next examined in decision box 148 to determine if the various service requests are local to another service request in the thread data set. A service request is local to another service request if the time interval between the service requests is no more than the selected time interval. If the service requests are local to one another, the service requests are considered to be components of the same transaction. If the service requests are not local to one another, the service requests are considered to be components of different or separate transactions.

Referring to Fig. 7, a string or sequence of service requests of the type generated in each thread data set in the service request file is illustrated. The string or sequence of service requests can refer either to a collection of service requests that are local with respect to at least one other service request in the sequence or to a single service request that is not local to another service request. As will be appreciated, a possible transaction pattern can have one or more service requests. Thus, in Fig 7, the time intervals ΔT_{a-d} separating the service requests 156a-e are no more than the selected time interval.

If a service request in a thread data set is local to another service request in the thread data set, the service

requests in command box 150 are combined and added as a new possible transaction pattern to a possible transaction list in a pattern characterization data set in the service request file. As will be appreciated, the service request can be local to another service request that is either discrete or part of a string or sequence of a number of service requests. In this manner, a sequence of service requests corresponding to a given possible transaction pattern is progressively expanded to include additional service requests.

The pattern characterization data set can include a variety of information, including the various selected time intervals and the corresponding thread data sets, with each thread data set including variables for identification of the thread, the various service requests associated with the thread organized in service request sequences, and the number of occurrences of each service request sequence. This list of service request sequences is hereinafter referred to as the possible transaction pattern list.

The pattern characterization data set can also include other information depending upon the application. By way of example, the pattern characterization data set can include the transaction type associated with each sequence of service requests. The transaction type can be based upon the identity of one or more of the service requests in the service request sequence corresponding to the transaction (e.g., the service request identifier).

beginning with the subject service request. Based on the fact that the subject service request is not local to the immediately preceding service request, the program assumes that the service request sequence of which the immediately
5 preceding service request is a part is completed. Because the service request is not local to a prior service request, the monitoring computer assumes that the service request is a part of a new service request sequence.

After command box 164 is completed, the monitoring
10 computer determines in decision box 168 if the end of the thread data set(s) in the record file has been reached for all of the service requests in all of the selected time intervals. If so, the process is terminated. If not, the computer proceeds to command box 172 and receives another service
15 request from a thread data set in the record file.

After command boxes 150 and 172 are completed, the monitoring computer returns to command box 140 and the preceding steps are repeated until all service requests in the record file have been read and processed.

20 In a communications data set having a plurality of threads, the monitoring computer applies the transaction pattern finding steps in parallel to service requests from different threads. Thus, the service requests in a plurality of different thread data sets are analyzed simultaneously.
25 Accordingly, at any point in time, a plurality of thread data sets can be active.

In a preferred embodiment, an optimal value for the selected time interval is selected by first selecting a series of selected time intervals for decision box 124. As noted above, the predetermined values can be selected using a predetermined increment in decision box 124. The values used for the selected time intervals are usually subsecond intervals ranging, for example, from about 50 to about 500 milliseconds.

Referring to Fig. 8, after the performance of the above-noted command and decision boxes with various selected time intervals, the numbers of possible transaction patterns from the pattern characterization data set (e.g., vertical axis) are plotted against the corresponding selected time intervals (e.g., horizontal axis). An optimal value for the selected time interval is selected in the central portion of the plateau 176 on the curve 180. Using the optimal value in decision box 124, the transaction pattern finding steps are repeated to yield a second pattern characterization data set. The transaction patterns in the second pattern characterization data set are believed to be the substantially optimal listing of transaction patterns for the various service requests in the record file.

Referring to Fig. 9A, the second embodiment of the present invention is depicted. Fig. 9A replaces Fig. 6C and otherwise has the same steps as the first embodiment in Figs. 6A and B. Fig. 6C is substantially identical to Fig. 9A

except for decision box 200 and command box 204. As noted above, the second embodiment, unlike the first embodiment, is applicable to applications and/or transactions that have more than one thread for a transaction.

5 There are generally three situations where an application or transaction has more than one thread per transaction. In one situation, a specific thread will perform only one service request type. After the service request type is performed, the application or transaction utilizes other threads. In
10 another case, the application or transaction is performed on a number of user threads in sequence. For example, a number of service requests are performed on one user thread and a number of later service requests are performed on another user thread. In this manner, the application or transaction can
15 move back and forth among user threads. In the last case, two or more client computers use a shared thread to perform service requests.

To address the use of more than one thread for a transaction, decision box 200, in response to a negative
20 response to decision box 148, determines if the service request sequence that immediately precedes in time the subject service request is local to a service request in other thread data sets.

Referring to Figs. 7 and 10-11, the three possible
25 results in decision box 200 of comparing the service requests in different thread data sets are illustrated. In Fig. 7, a

parallel. For example, the service request or service request
sequence in one thread data set can be sequentially
transferred to a second thread data set and to a third thread
data set (e.g., series) or to two or more other thread data
5 sets at substantially the same time (e.g., parallel).

If the service request sequence is local to a service
request in another thread, the service request sequence in
command box 204 is transferred to the possible transaction
pattern list in the other thread data set. After completing
10 command box 204, the monitoring computer returns to command
box 140.

If the service request sequence is not local to a service
request in another thread, the monitoring computer continues
to decision box 152.

The Transaction Pattern Matching Steps

In the transaction pattern matching steps, the
communications data set is compared against the pattern
characterization data set from the transaction pattern finding
20 steps to determine whether at least a portion of the plurality
of service packets are part of one or more transactions. The
start and stop times of the service requests corresponding to
the service packets can then be used to provide a response
time for the transaction and/or application.

25 Referring to Fig. 6D, to initiate the transaction pattern
matching steps, a service request file is opened in command

box 250 to receive service requests read from the communications data set.

In command box 254, a service request is read from the communications data set and dispatched in command box 258 to
5 the appropriate thread to form a thread data set in the service record file with one thread data set existing for each thread.

In decision box 256, the monitoring computer determines if the last service request in the communications data set has
10 been read. If so, the monitoring computer proceeds to command box 262. If not, the monitoring computer returns to command box 254. In this manner, all service requests in the communications data set are sorted by thread data set before the steps of Fig. 6E.

15 Referring to Fig. 6E, the service request sequences in each thread data set, which are ordered based on start and stop times, are compared against the pattern characterization data set to determine whether at least a portion of the service request sequences are part of a possible transaction
20 pattern.

In decision box 266, the matching process is initiated by comparing a subject service request in a thread data set against the initial service request in the various transaction patterns obtained from all of the thread data sets in the
25 pattern characterization data set. If the service request does not match any of the initial service requests in the

transaction patterns obtained for all of the threads, the monitoring computer receives another service request in command box 262 and the decision box 266 is repeated. If the service request matches an initial service request, another
5 service request from the thread data set is received in command box 270.

In decision box 274, the monitoring computer determines whether the service request received in command box 270 is local to the initial service request identified in decision
10 box 266. If not, the monitoring computer returns to command box 262 and repeats the steps described above with another service request. If so, the monitoring computer in decision box 278 determines based on the transaction pattern in the pattern characterization data set if the service request read
15 in command box 270 is the final service request in the transaction pattern.

To determine if the service request is the final service request in a probable transaction, the monitoring computer relies upon the sequence of service requests in the
20 transaction patterns in the thread data set. If the service request is not the final service request in the probable transaction, the monitoring computer returns to command box 270. If the service request is the final service request, the monitoring computer records in command box 282 the start and
25 stop time for the probable transaction pattern and proceeds to decision box 286.

In decision box 282, if it is determined that if all of the service requests in the thread data sets have been characterized into service request sequences, the program is terminated. Otherwise, the computer returns to command box 5 262. Preferably, the preceding steps are performed in parallel for all of the thread data sets.

The preceding steps yield a pattern analysis data set containing the various service request sequences that together comprise the various transactions, the response times for each 10 transaction, and the location of the recording device. The pattern analysis data set can include additional information, such as user identification and thread identification.

Referring to Fig. 9B, the second embodiment of the present invention is depicted. Fig. 9B replaces Fig. 6E and 15 otherwise has the same steps as the first embodiment in Fig. 6D. Fig. 9B is substantially identical to Fig. 6E except for decision box 300 and command box 304. To address the use of more than one thread for a transaction, decision box 300, in response to a negative response to decision box 274, 20 determines if the service request sequence is local to a service request in another thread data set. If the service request sequence is local to a service request in one or more other thread data set(s), the service request sequence in command box 304 is transferred to the other thread data 25 set(s). After completing command box 304, the monitoring computer returns to command box 262. If the service request

sequence is not local to a service request in another thread data set, the monitoring computer continues to decision box 278.

After completion of the preceding steps of the first or second embodiments, the information in the pattern analysis data set can be used to generate performance statistics and transaction counts. For example, the resulting transaction response data can be aggregated into a fixed time interval, such as five minutes, and response time statistics, such as maximum, mean, standard deviation, and 70th, 80th and 90th percentiles, calculated by transaction type. The discrete transaction response time information can be used to analyze response times by service request breakdown within the transaction or by user class and other variants. An example of an analysis report for a transaction is shown in Fig. 12. The data can also be used to determine transaction counts performed over a discrete time period.

The pattern characterization data set can include transaction patterns determined by a process other than the transaction pattern finding steps. By way of example, a test can be performed for the transactions of interest to identify the service request sequences generated during the transactions. This method may be incomplete in some cases because a transaction can generate a multiplicity of service request sequences based on the particular responses selected by the user.

66320-1003660

The transaction pattern finding and matching steps can be modified to discard incomplete service request sequences. Such service request sequences are typically the result of initiating the selected time period for recording of service packets after a transaction has already started or ending the selected time period before a transaction has ended. To eliminate incomplete service request sequences, any service request sequence in a thread data set that is not separated from a preceding or succeeding service request by a time interval that is more than the selected time interval is discarded. This modification assumes, of course, that any service requests separated by a time interval that is more than the selected time interval are not part of the same service request sequence.

While various embodiments of the present invention have been described in detail, it is apparent that modifications and adaptations of those embodiments will occur to those skilled in the art. It is to be expressly understood, however, that such modifications and adaptations are within the scope of the present invention, as set forth in the appended claims.

What is claimed is:

1. A method for identifying a transaction corresponding to a plurality of service packets communicated between a source node and a destination node, comprising:

5 providing a communications data set comprising a plurality of service packets and information relating to the order in which said service packets are communicated on a communications line between a source node and a destination node; and

10 comparing said communications data set against a pattern characterization data set comprising information relating to a predetermined ordering of service packets corresponding to a transaction to determine whether at least a portion of said plurality of service packets correspond to said transaction.

15 2. The method as claimed in Claim 1, wherein said communications data set includes a received time corresponding to each service packet and said providing step comprises:

reading with a probe said service packets from said communications line; and

20 recording said service packets and said received time, wherein said received time corresponds substantially to the time said packet is read by said probe.

3. The method as claimed in Claim 2, wherein said probe is located between said source and destination nodes and further comprising:

25 adding to said received time for a received packet a transit time corresponding substantially to the time required by a service packet to travel from said probe to at least one of said source node and destination node.

30 4. The method as claimed in Claim 1, wherein a plurality of said service packets have at least one of a node address and port number and said communications data set includes a received time corresponding to each service packet and said providing step comprises:

35 reading with a probe said service packets from said communications line;

filtering said service packets based on at least one of node address and port number to form filtered service packets; and

40 recording said filtered service packets and said received time, wherein said received time corresponds substantially to the time said filtered service packet is read by said probe.

45 5. The method as claimed in Claim 1, wherein said service packets correspond to a plurality of threads with each thread corresponding to thread identification information and said comparing step comprises:

sorting said service packets in said communications data set into a plurality of thread data sets wherein the service packets in each thread data set have the same thread identification information.

50 6. The method as claimed in Claim 1, wherein said service packets include service request packets and service results packets, each service request corresponds to a service request, and said comparing step comprises:

 identifying service request packets in said service
55 packets based on the contents of said service packets.

 7. The method as claimed in Claim 1, wherein said service packets include service request packets and service results packets and said comparing step comprises:

 identifying service request packets in said service
60 packets based on the contents of said service packets;

 correlating service results packets with corresponding service request packets; and

 determining the start and stop times for the service request.

65 8. The method as claimed in Claim 7, further comprising:

 computing a response time for said transaction.

 9. The method as claimed in Claim 7, further comprising:

70 comparing the time interval between the stop of a first service request and the start of a second service request against a predetermined value for said time interval to identify a sequence of service requests corresponding to a transaction, wherein said predetermined ordering of service
75 packets corresponds to said sequence of service requests.

10. The method as claimed in Claim 1, wherein said service packets correspond to a plurality of service requests and said comparing step comprises:

first matching a first service request in said
80 communications data set with a first service request in said predetermined ordering of service packets;

second matching a second service request in said communications data set with a second service request in said predetermined ordering of service packets, wherein a time
85 interval between said first and second service requests is no more than a predetermined value.

11. The method as claimed in Claim 1, wherein said service packets correspond to a plurality of service requests, said service requests correspond to a plurality of thread data
90 sets, and said comparing step comprises:

first matching a first service request corresponding to a first thread with a first service request in said predetermined ordering of service packets;

second matching a second service request corresponding to
95 a second thread with a second service request in said predetermined ordering of service packets, wherein a time interval between said first and second service requests is no more than a predetermined value.

12. A non-intrusive system for identifying a transaction
100 corresponding to a plurality of service packets communicated
between a source node and a destination node, comprising:

means for recording a plurality of service packets
communicated on a communications line between a source node
and a destination node, said recording means being in
105 communication with said communications line; and

means, in communication with said recording means, for
identifying a transaction corresponding to at least a portion
of said plurality of packets.

110 13. The non-intrusive system as claimed in Claim 12,
wherein said identifying means comprises means for comparing
said plurality of service packets and the order in which said
service packets are received by said recording means against
a predetermined ordering of service packets relating to said
transaction.

115 14. The non-intrusive system as claimed in Claim 12,
wherein said recording means is located on a portion of said
communications line between said source and destination nodes.

15. A method for identifying a transaction corresponding to a plurality of service packets communicated between a source node and a destination node, comprising:

providing a communications data set comprising (i) a plurality of service packets corresponding to a plurality of service requests and (ii) the start and stop times for each service request; and

comparing the time interval between the stop of a first service request and the start of a second service request against a predetermined value for said time interval to identify a sequence of said service requests corresponding to a transaction.

16. The method as claimed in Claim 15, wherein said predetermined value ranges from about 50 to about 500 milliseconds.

17. The method as claimed in Claim 15, wherein a portion of said service packets correspond to a thread and at least two service packets correspond to different threads and said service packets comprise a plurality of service request packets and service result packets corresponding to different service requests and said comparing step comprises:

identifying service request packets in said service packets;

correlating service result packets with corresponding service request packets to form a plurality of service data

subsets with the service packets in each service data subset corresponding to a service request; and

145 sorting said service data subsets by thread to form a plurality of thread data sets of service requests with the service packets in said thread data set having the same thread addresses.

150 18. The method as claimed in Claim 15, wherein a plurality of sequences of service requests correspond to a plurality of transactions and said comparing step comprises:

recording each of said sequences of service requests and the number of occurrences of each sequence in a pattern characterization data set.

155 19. The method as claimed in Claim 15, further comprising:

selecting a second predetermined value;

160 comparing said time interval against said second predetermined value to identify a second sequence of said service requests corresponding to a second transaction; and

recording each of said second sequences of service requests and the number of occurrences of each of said second sequences in a second data set.

165 20. The method as claimed in Claim 19, further comprising:

selecting a third predetermined value based on the relationship between (i) the number of said sequences of service requests and said predetermined value and (ii) the

number of said second sequences of service requests and said
170 second predetermined value.

21. The method as claimed in Claim 20, further
comprising:

comparing said time interval against said third
predetermined value for said time interval to identify a third
175 sequence of said service requests corresponding to a third
transaction.

22. The method as claimed in Claim 21, further
comprising:

552240 T00E9E60
180 comparing said third sequence against said communications
data set to determine whether at least a portion of said
plurality of service packets correspond to said transaction.

23. The method as claimed in Claim 22, further
comprising:

computing a response time for said transaction.

185 24. The method as claimed in Claim 15, wherein said
comparing step produces a pattern characterization data set
listing a plurality of sequences of service requests and
further comprising:

190 second comparing said service requests from said
comparing step with said pattern characterization data set to
determine if said service requests are contained in said
pattern characterization data set.

25. The method as claimed in Claim 15, wherein said
first service request corresponds to a first thread and said
195 second service request corresponds to a second thread.

26. A non-intrusive system for determining transaction level activity between a source node and a destination node, comprising:

means for recording a plurality of service packets
200 communicated on a communications line between a source node and a destination node, wherein said service packets relate to a number of transactions and said recording means is in communication with said communications line; and

means for determining said number of transactions in
205 communication with said recording means.

27. The non-intrusive system as claimed in Claim 26, wherein said determining means comprises means for comparing said plurality of service packets and the order in which said service packets are received by said recording means against
210 a predetermined ordering of service packets relating to said transaction.

28. The non-intrusive system as claimed in Claim 26, wherein at least a portion of said plurality of packets relate to different service request packets, said recording means
215 provides a first data set including (i) said plurality of packets and (ii) the start and stop times for each service request, and said determining means comprises means for comparing the time interval between the stop time of a first service request and the start time of a second service request
220 against a predetermined value for said time interval to

identify a sequence of said service requests corresponding to a transaction.

09363004 024859

ABSTRACT

The present invention provides a method and apparatus for measuring transaction response times. The method and apparatus can identify service request sequences corresponding to a transaction and the start and stop times for the transaction. The invention can be applied non-intrusively/non-invasively to the service packets communicated between a source and destination node.

10

6632/0" T0083260

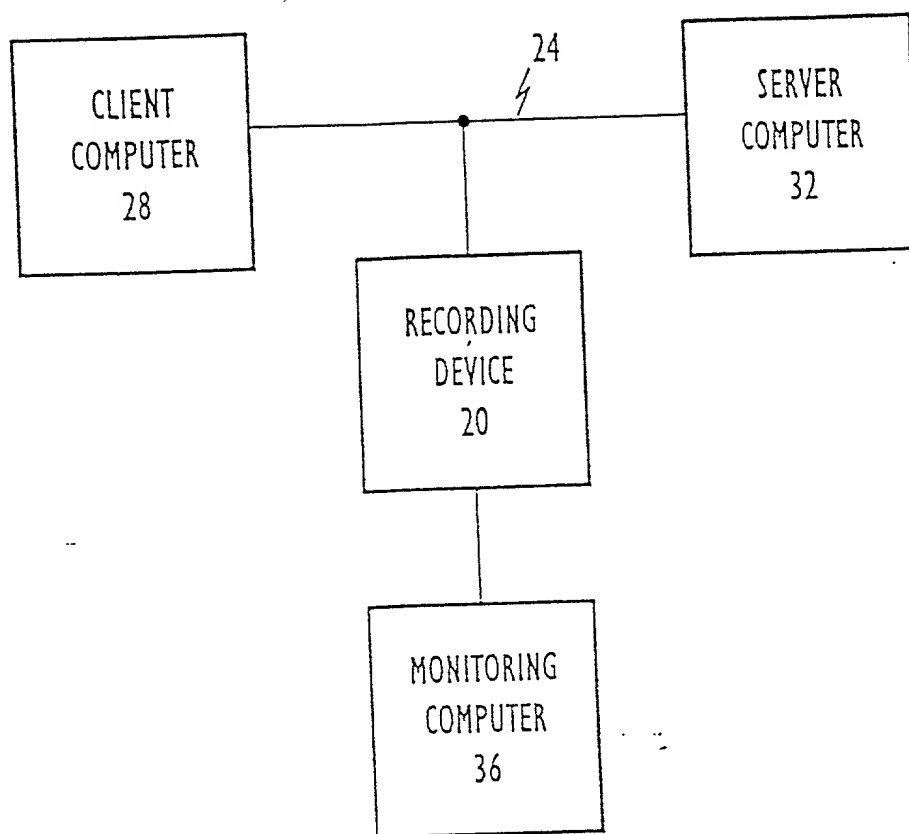
[illegible]

FIG. 1

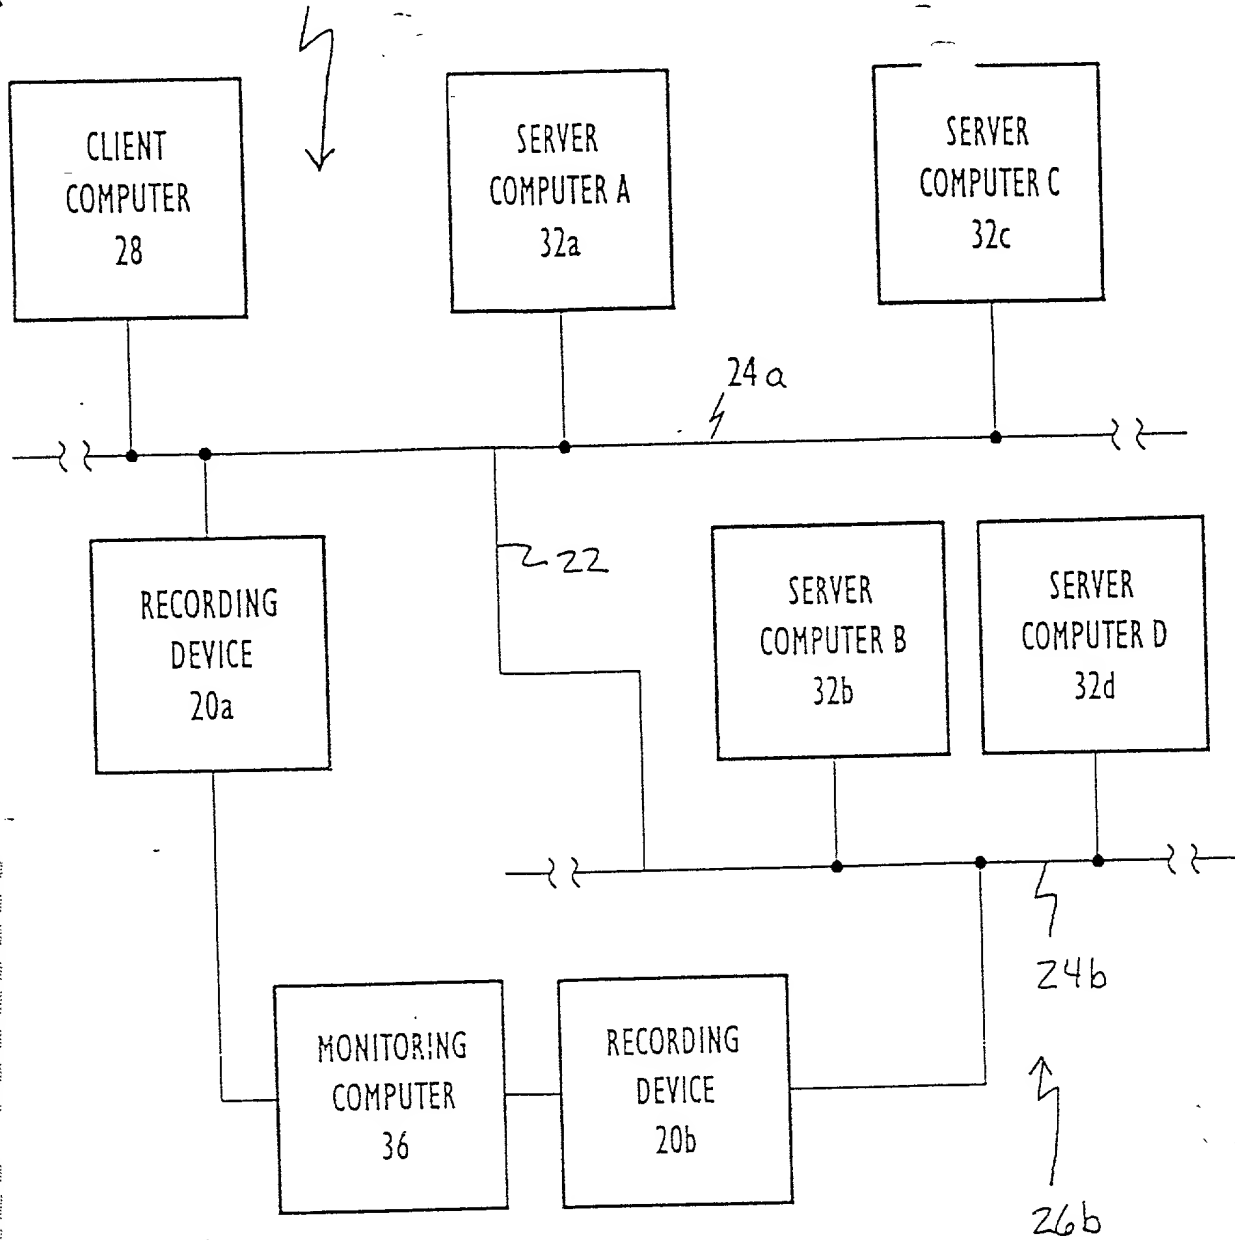


FIG. 2

NODE ADDRESS 40	PORT NO. 44	INFORMATION TEXT 48
--------------------	----------------	------------------------

38



FIG. 3

66220" T006660

662220" T02220

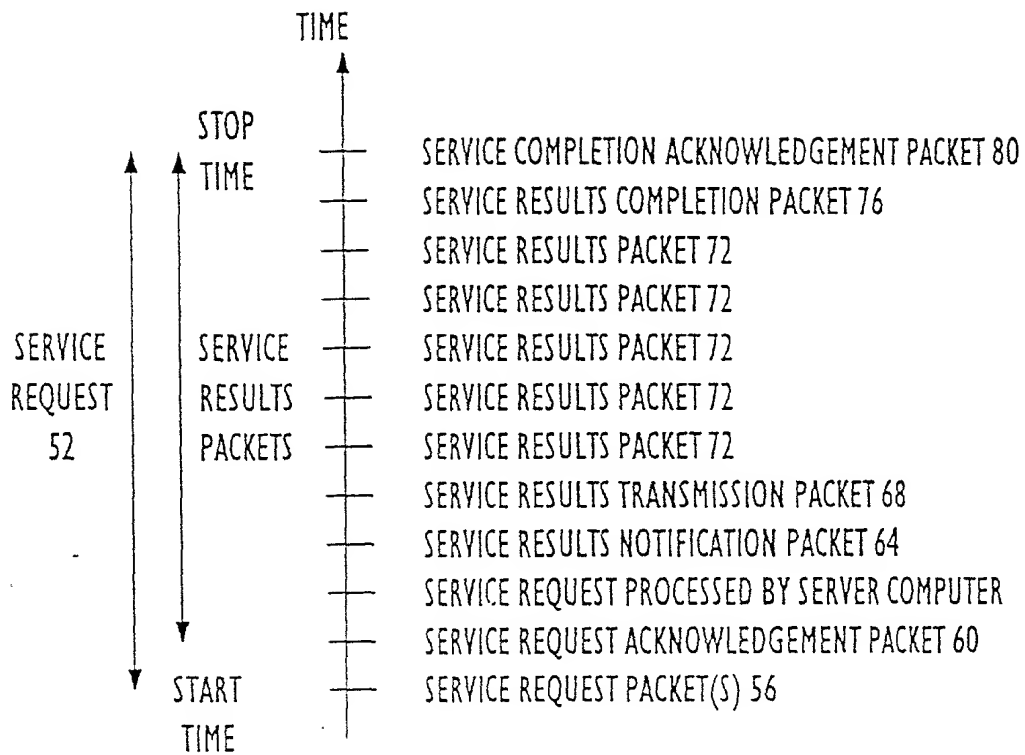


FIG. 4

653240-1003360

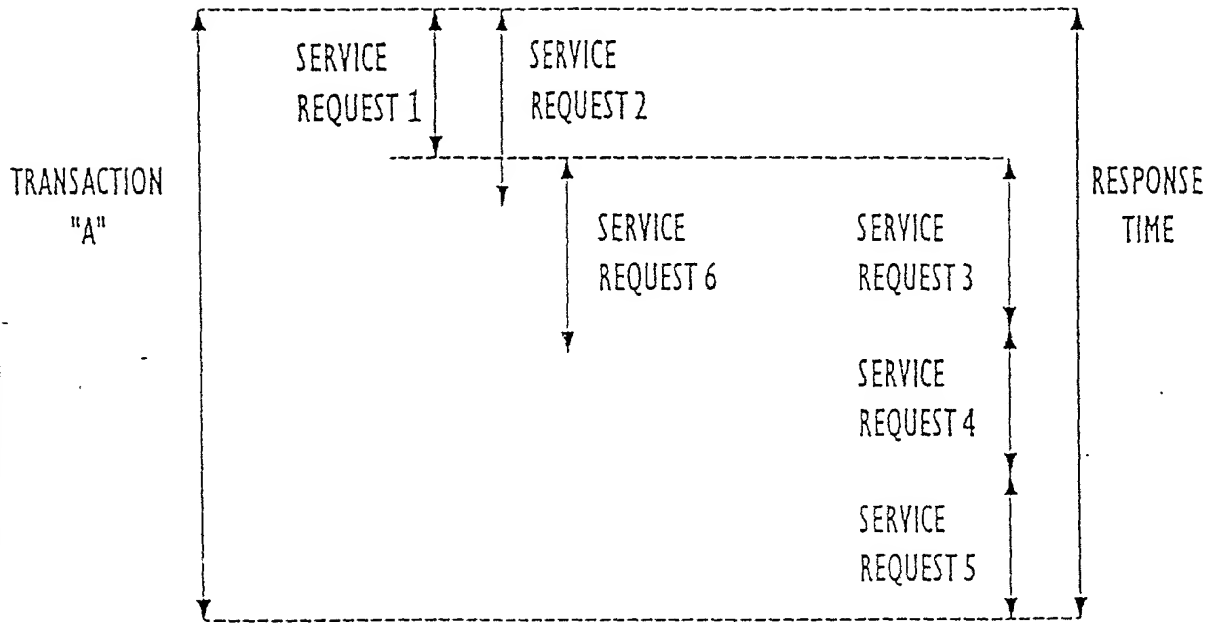


FIG. 5

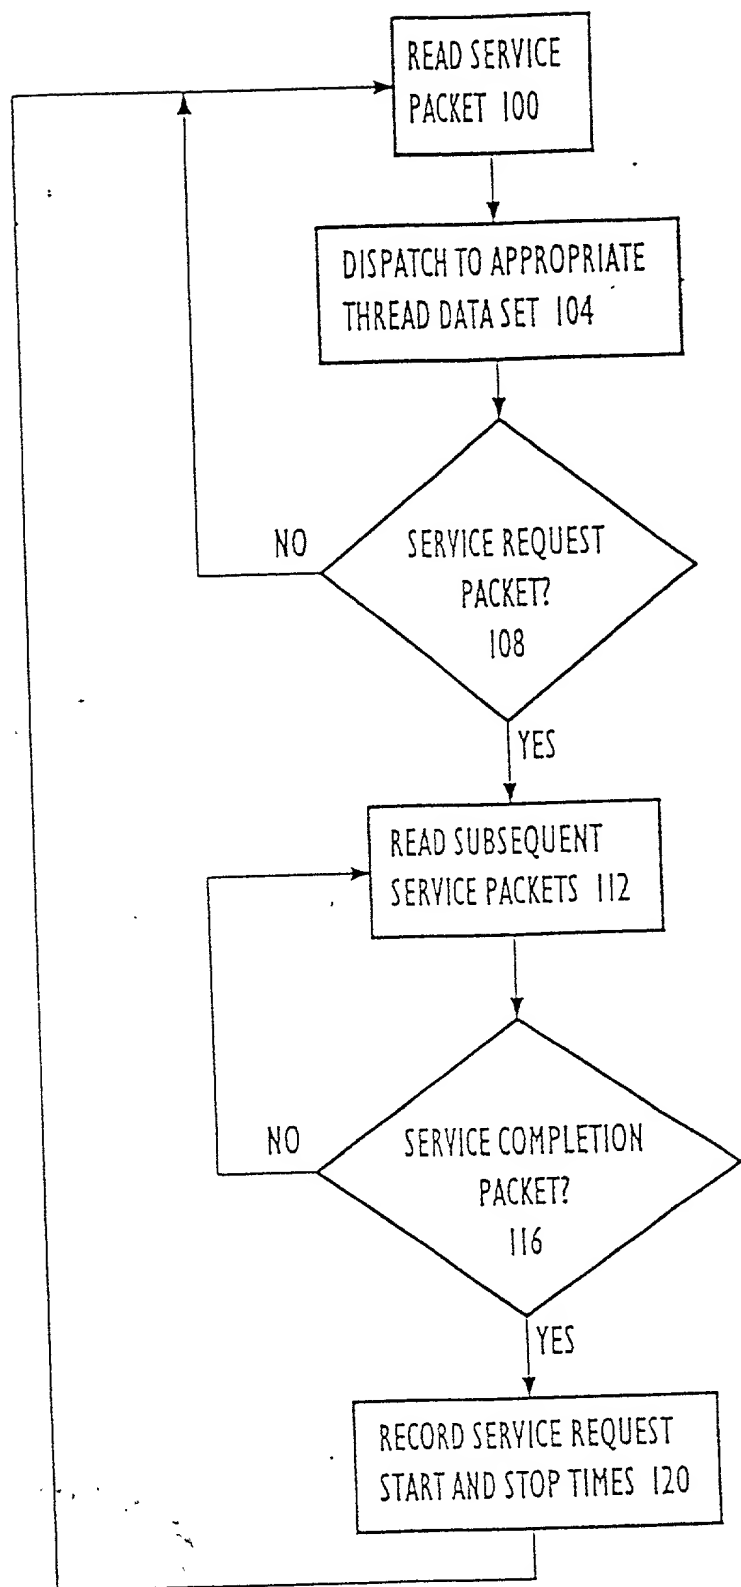


FIG. 6A

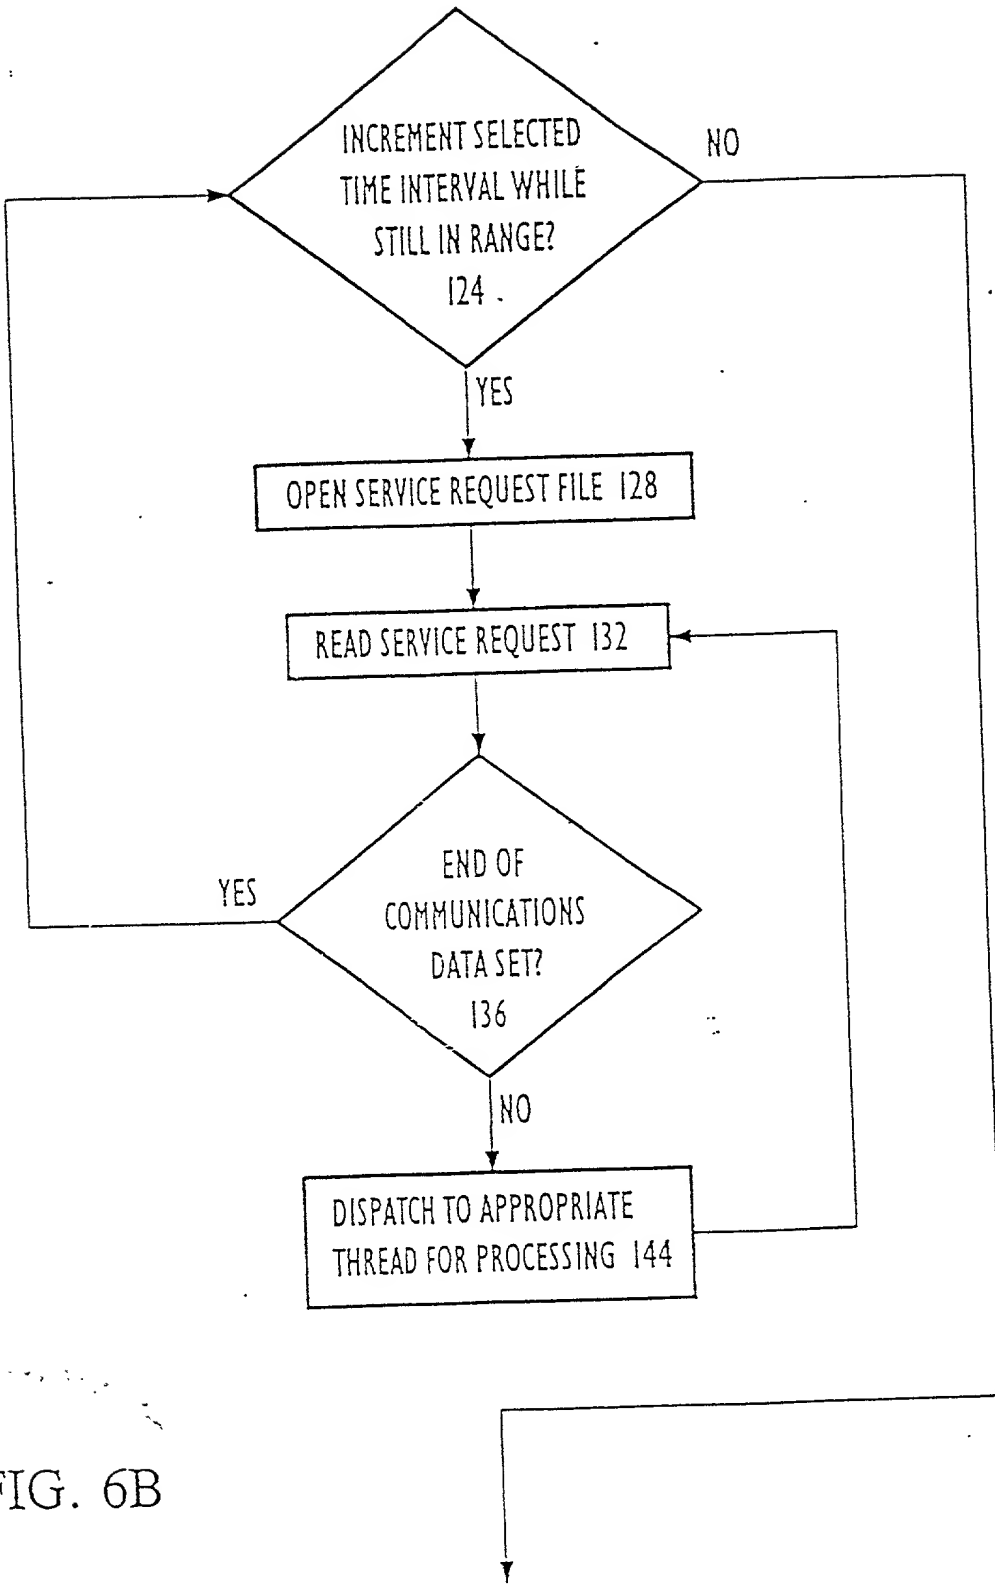


FIG. 6B

66220-TOE5E60

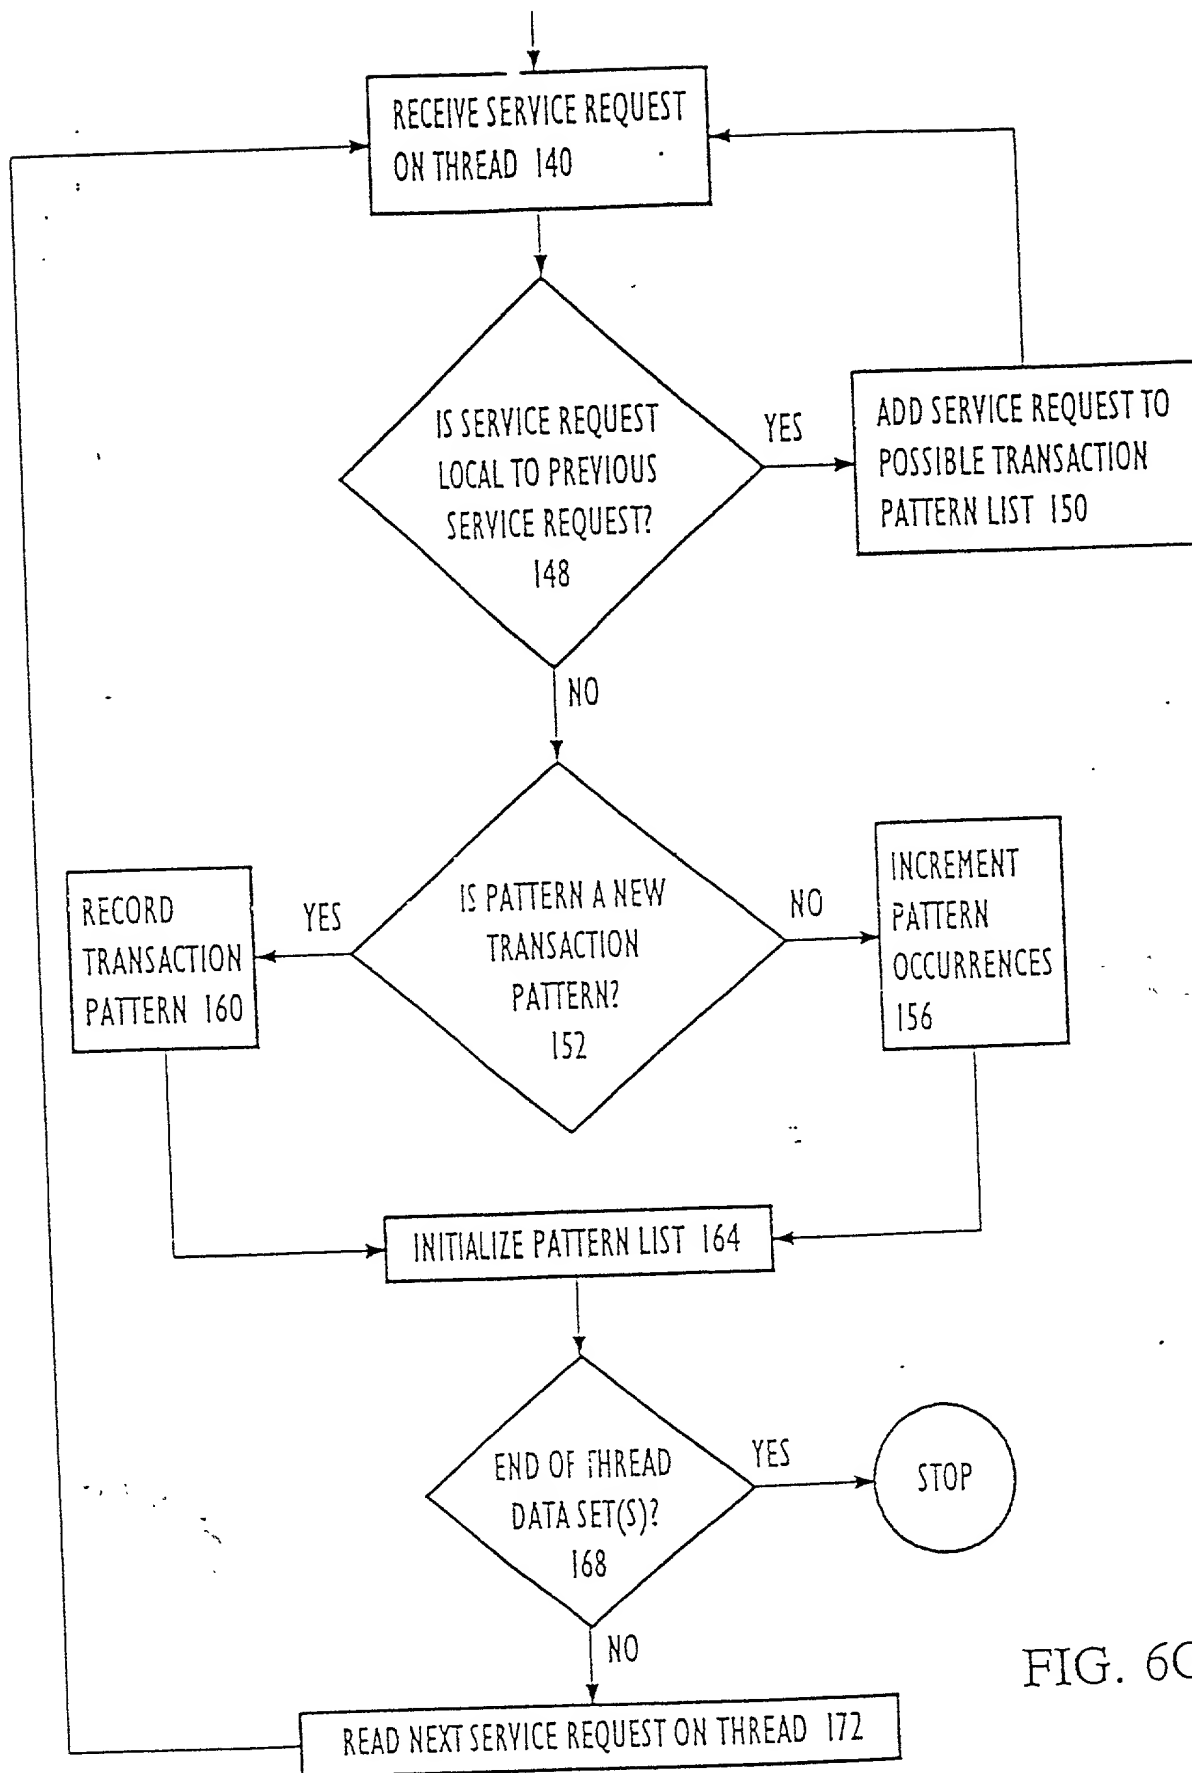


FIG. 6C

66340 T000360

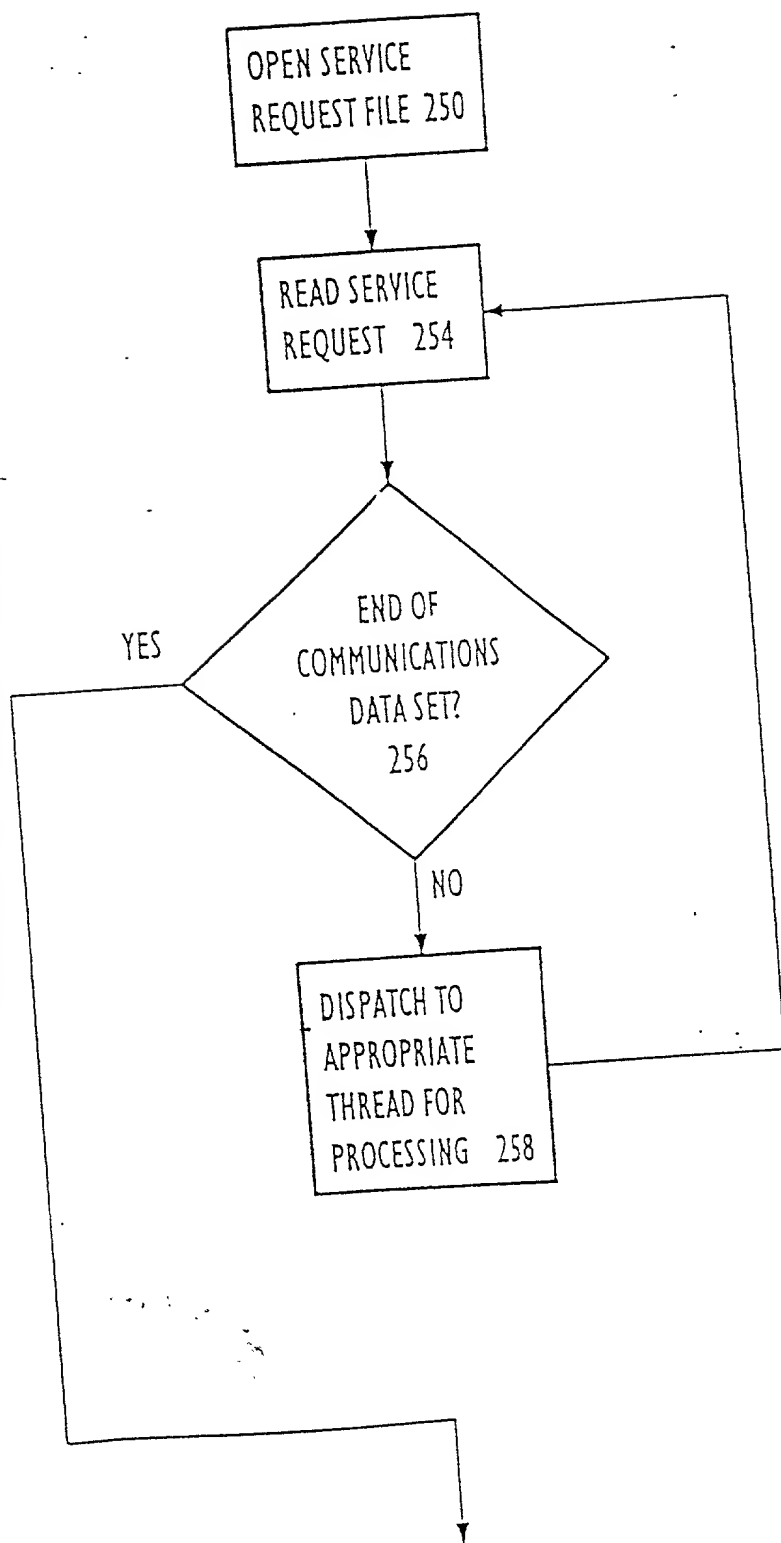


FIG. 6D

66240-1000000

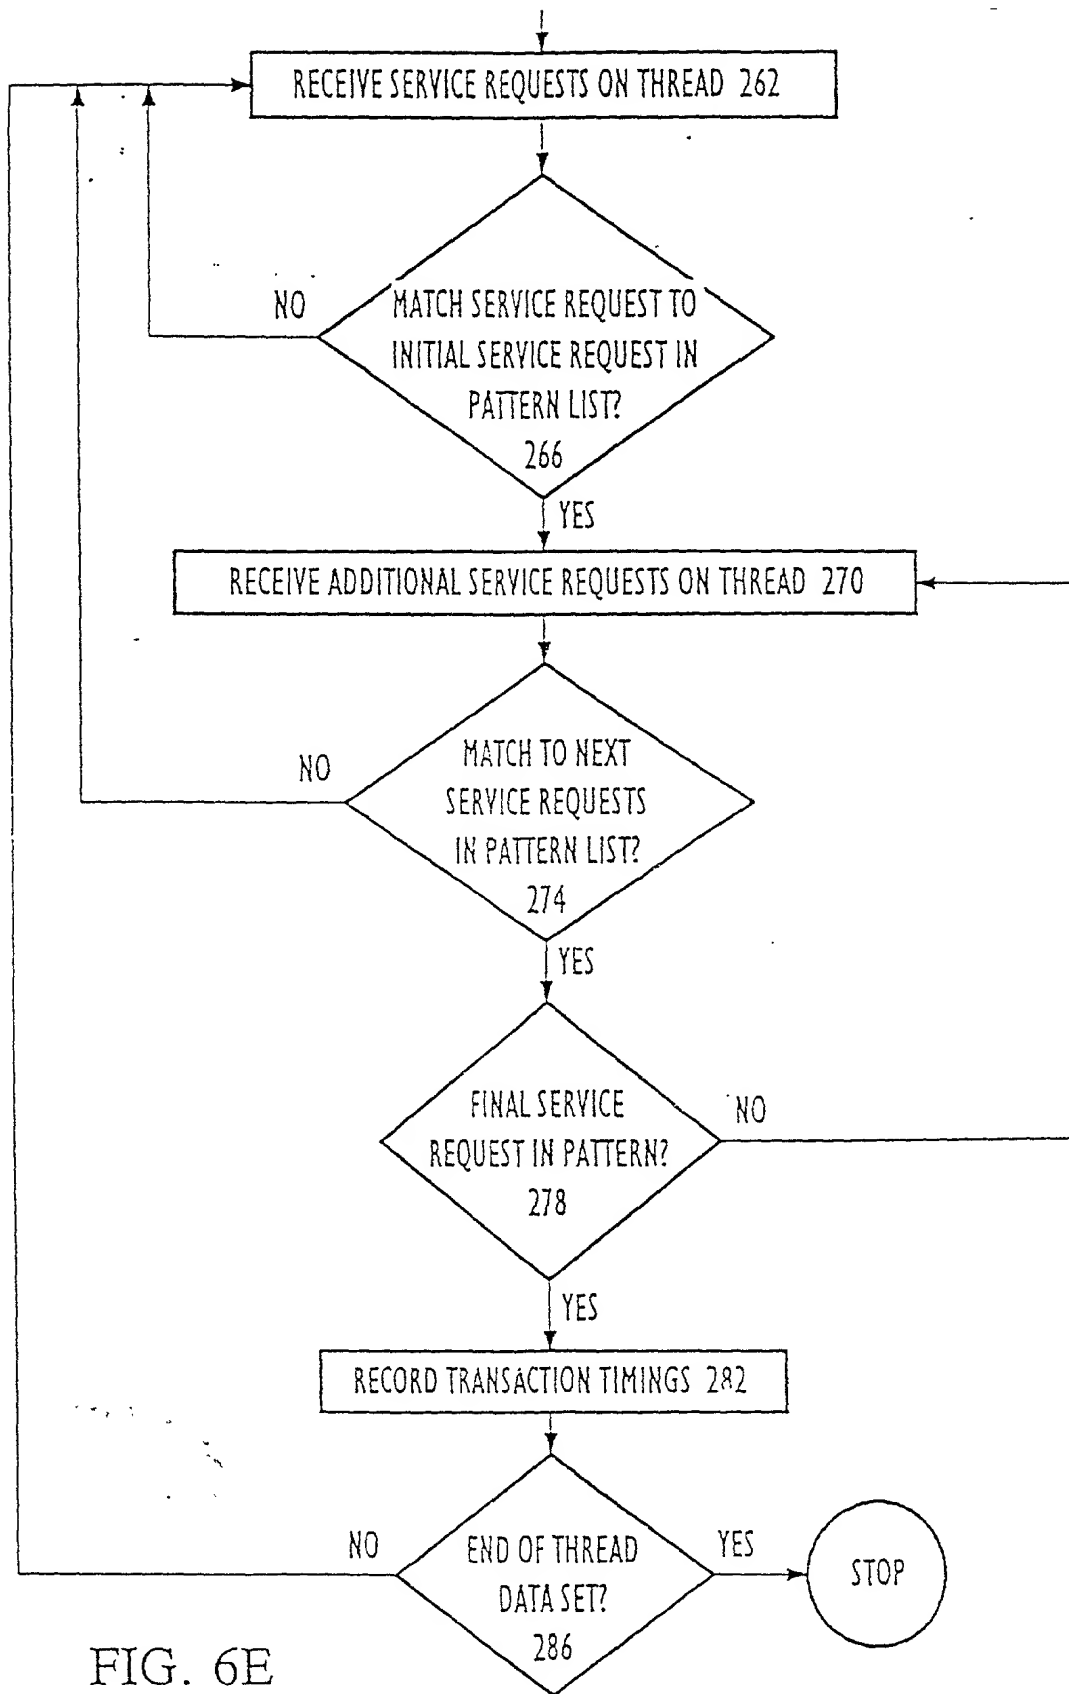


FIG. 6E

663240-100E9E60

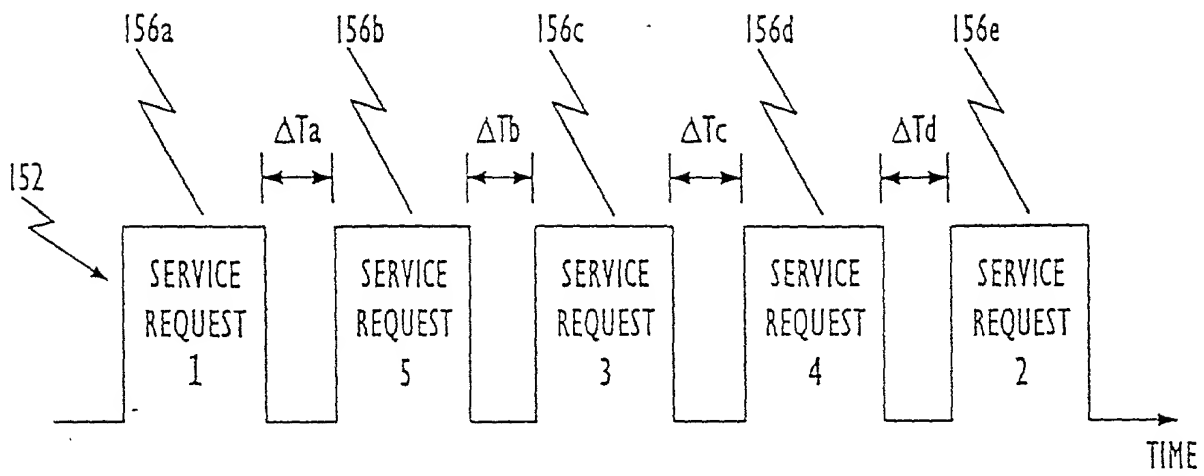


FIG. 7

6630 T06960

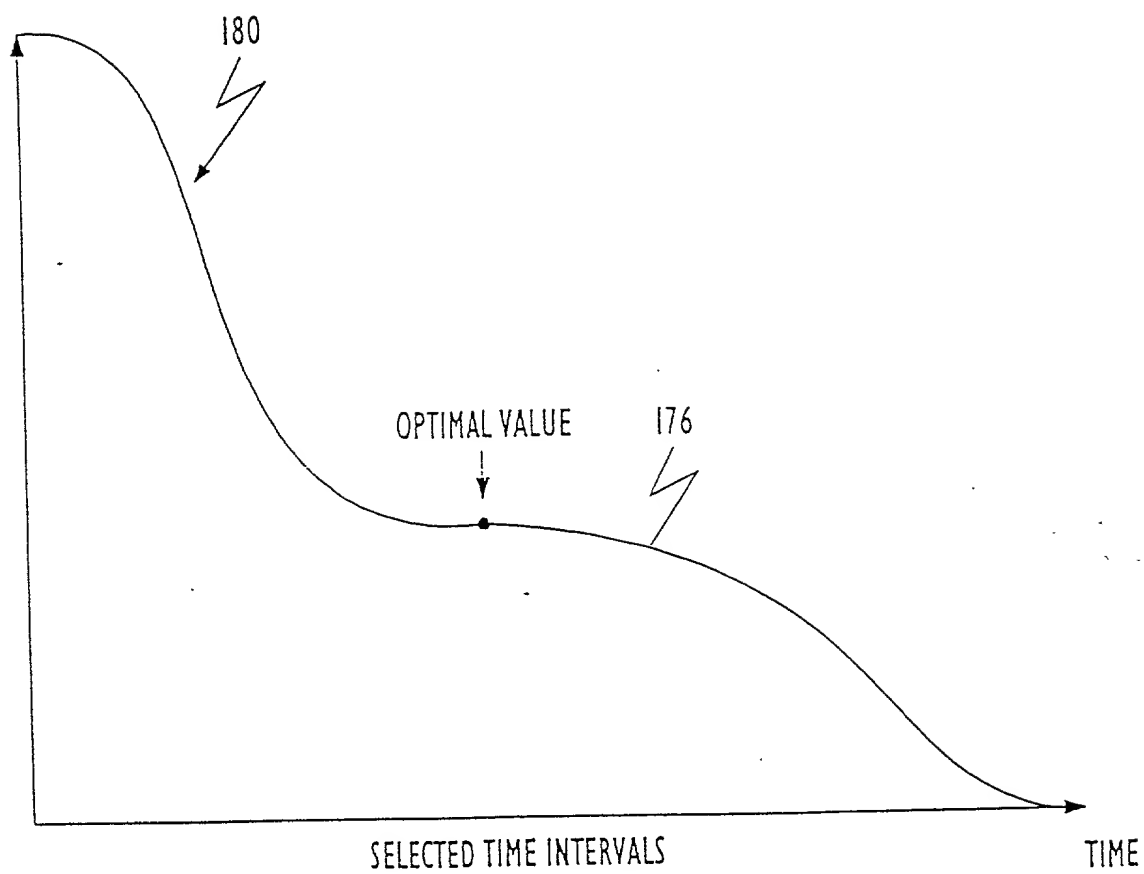


FIG. 8


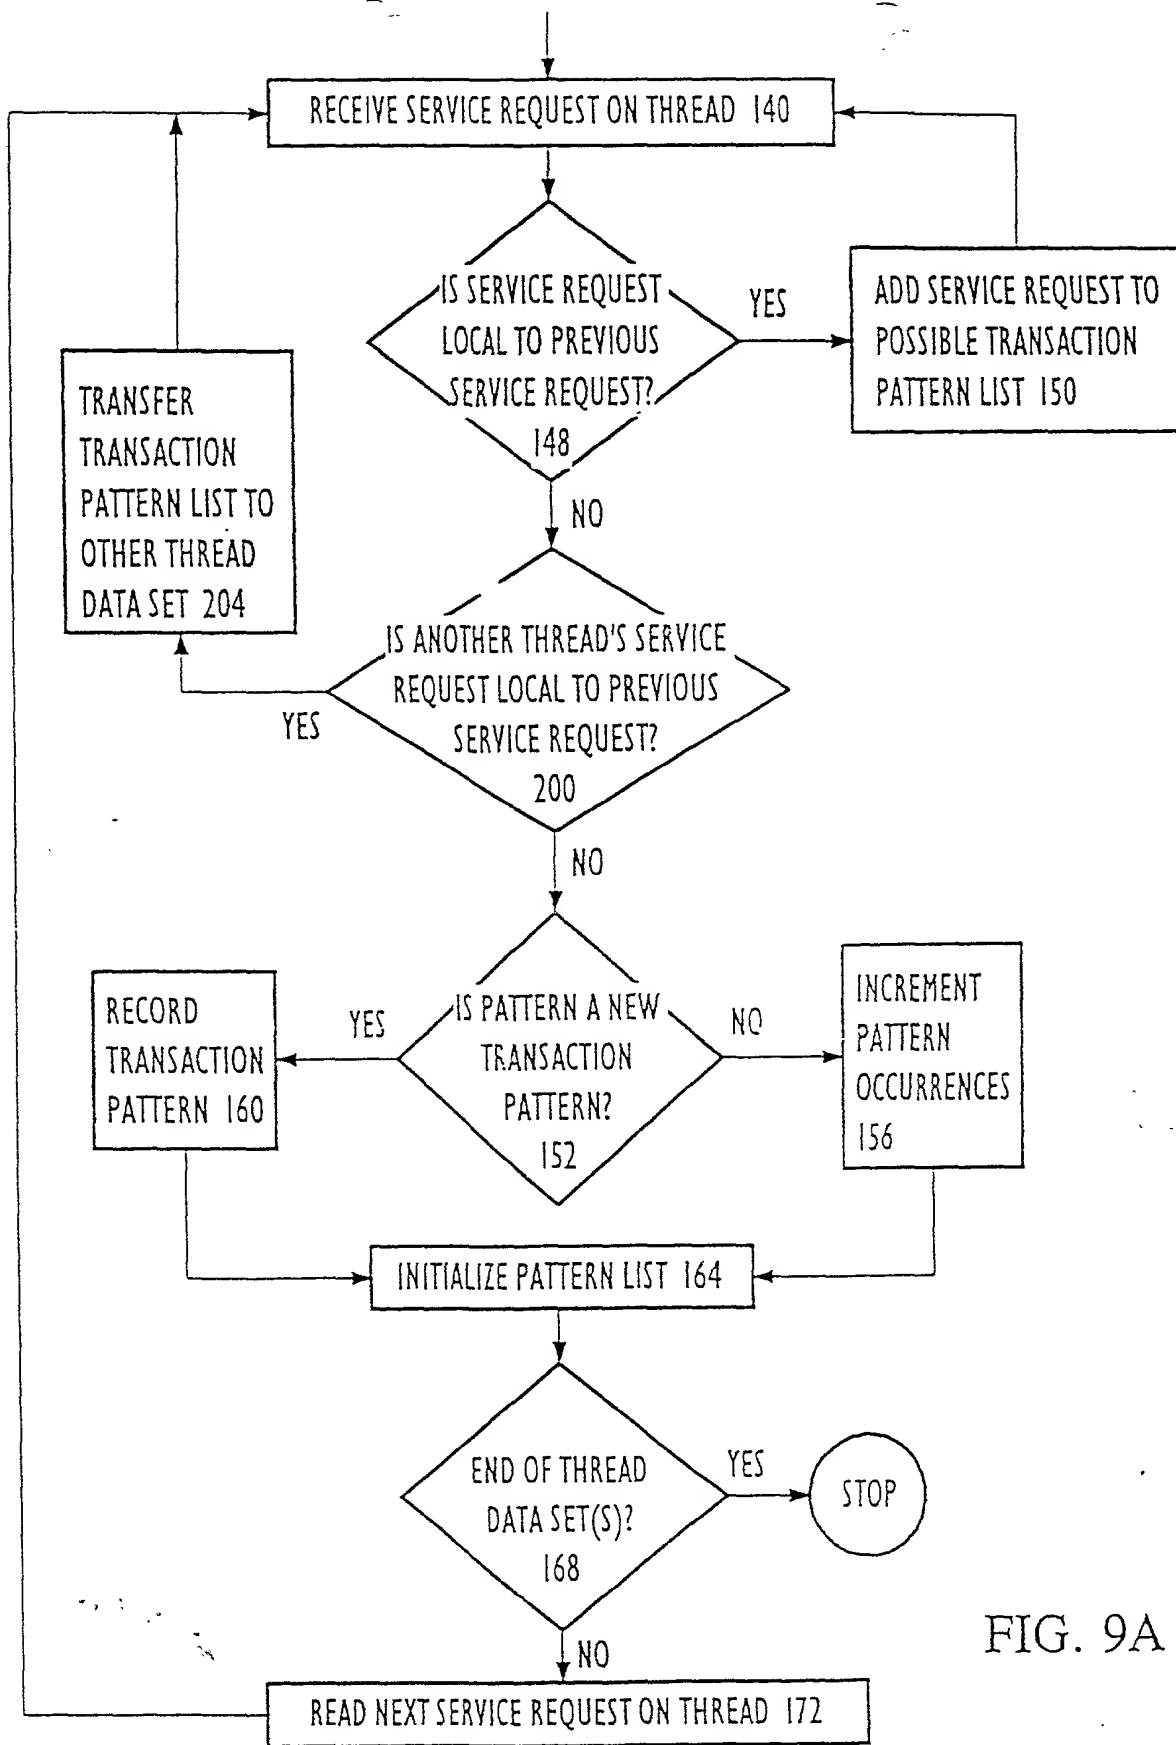


FIG. 9A

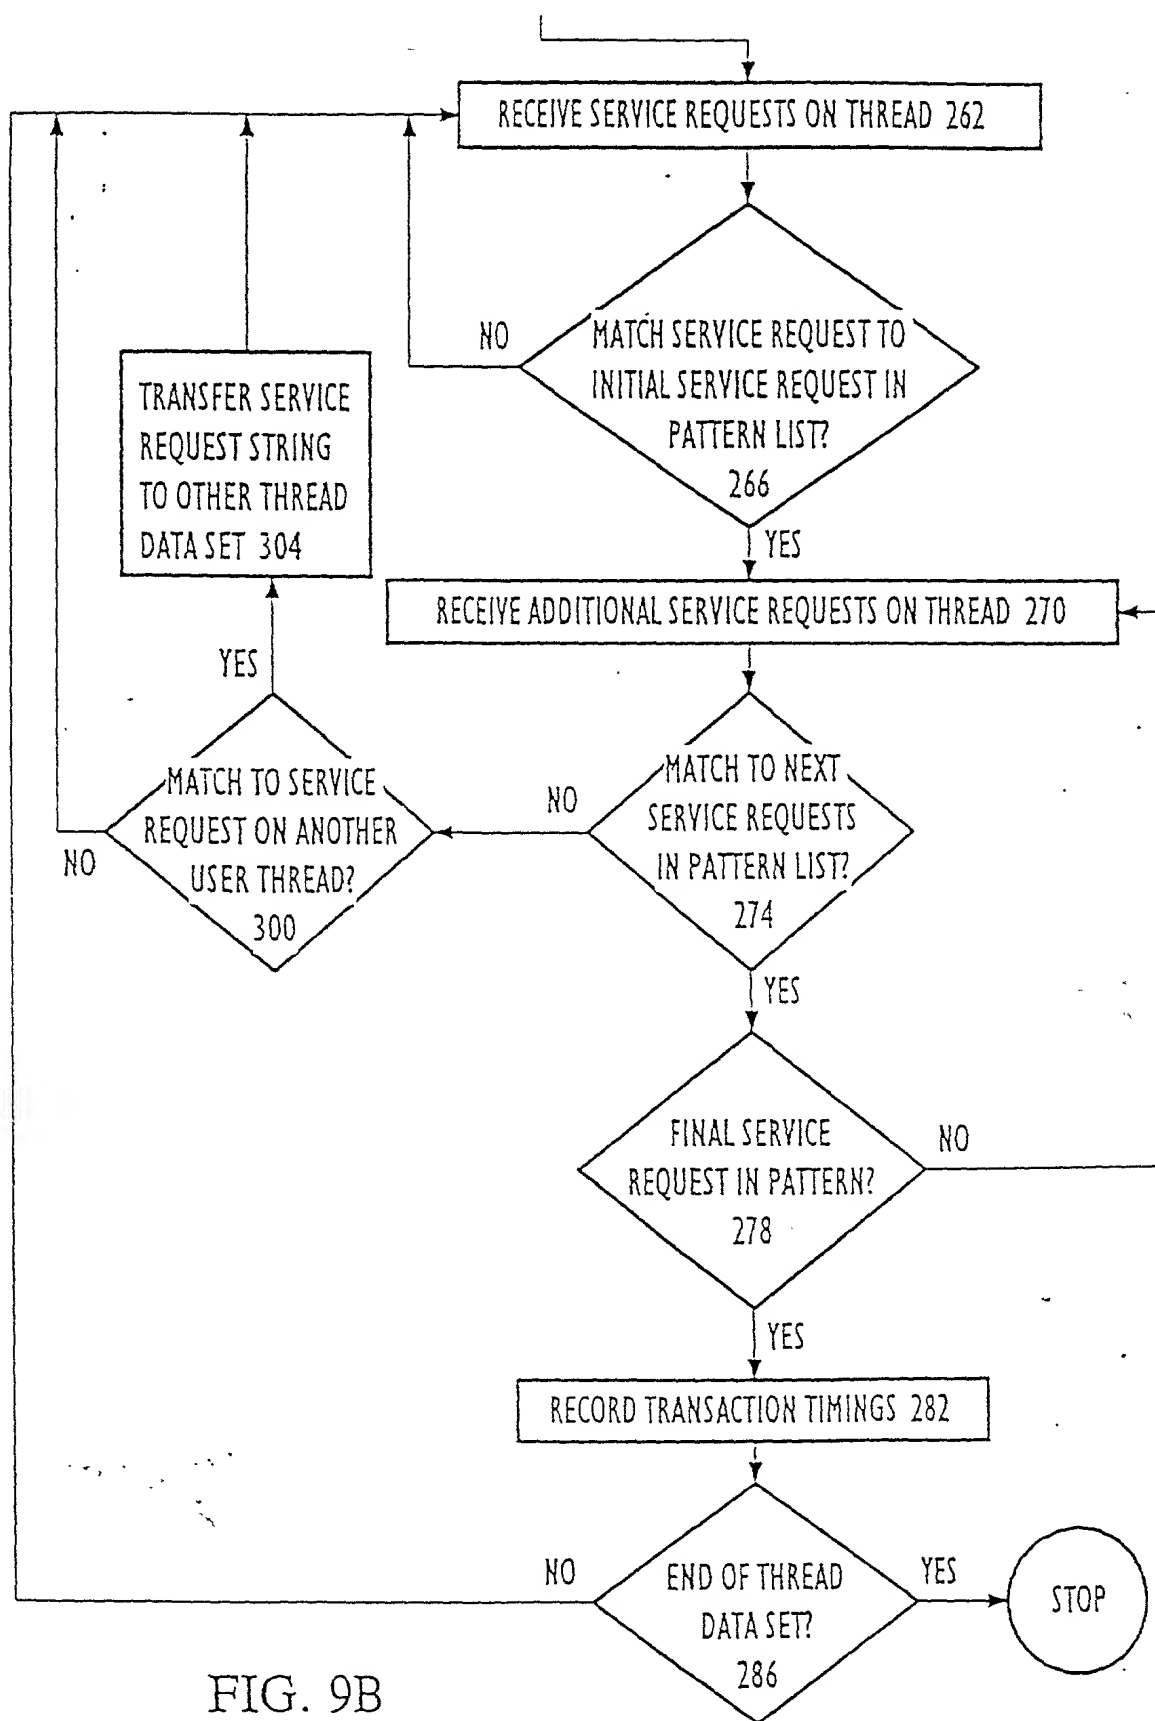

6682/0" T00E3E60

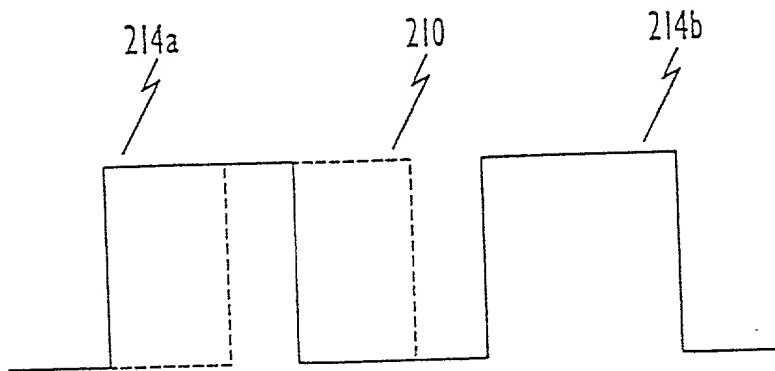


FIG. 10

66240-1000000

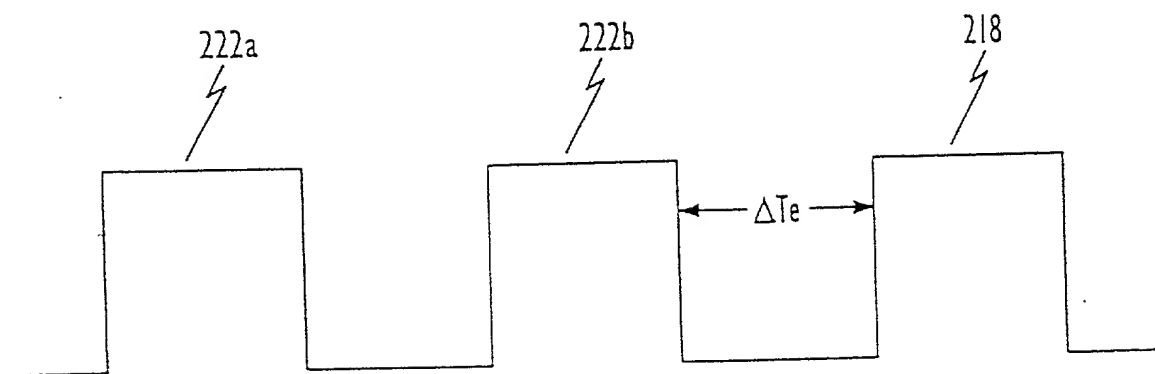


FIG. 11

668270-10069650

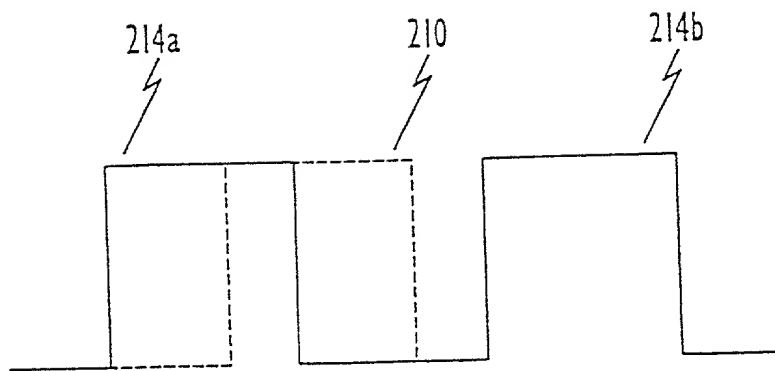


FIG. 10

662,000,000,000

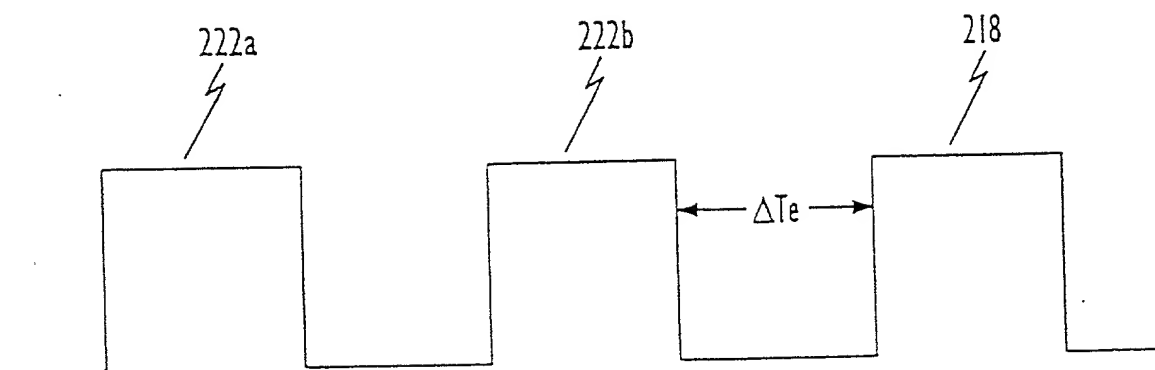


FIG. 11

SERVER COMPUTER CPU % Utilization (400% Possible)

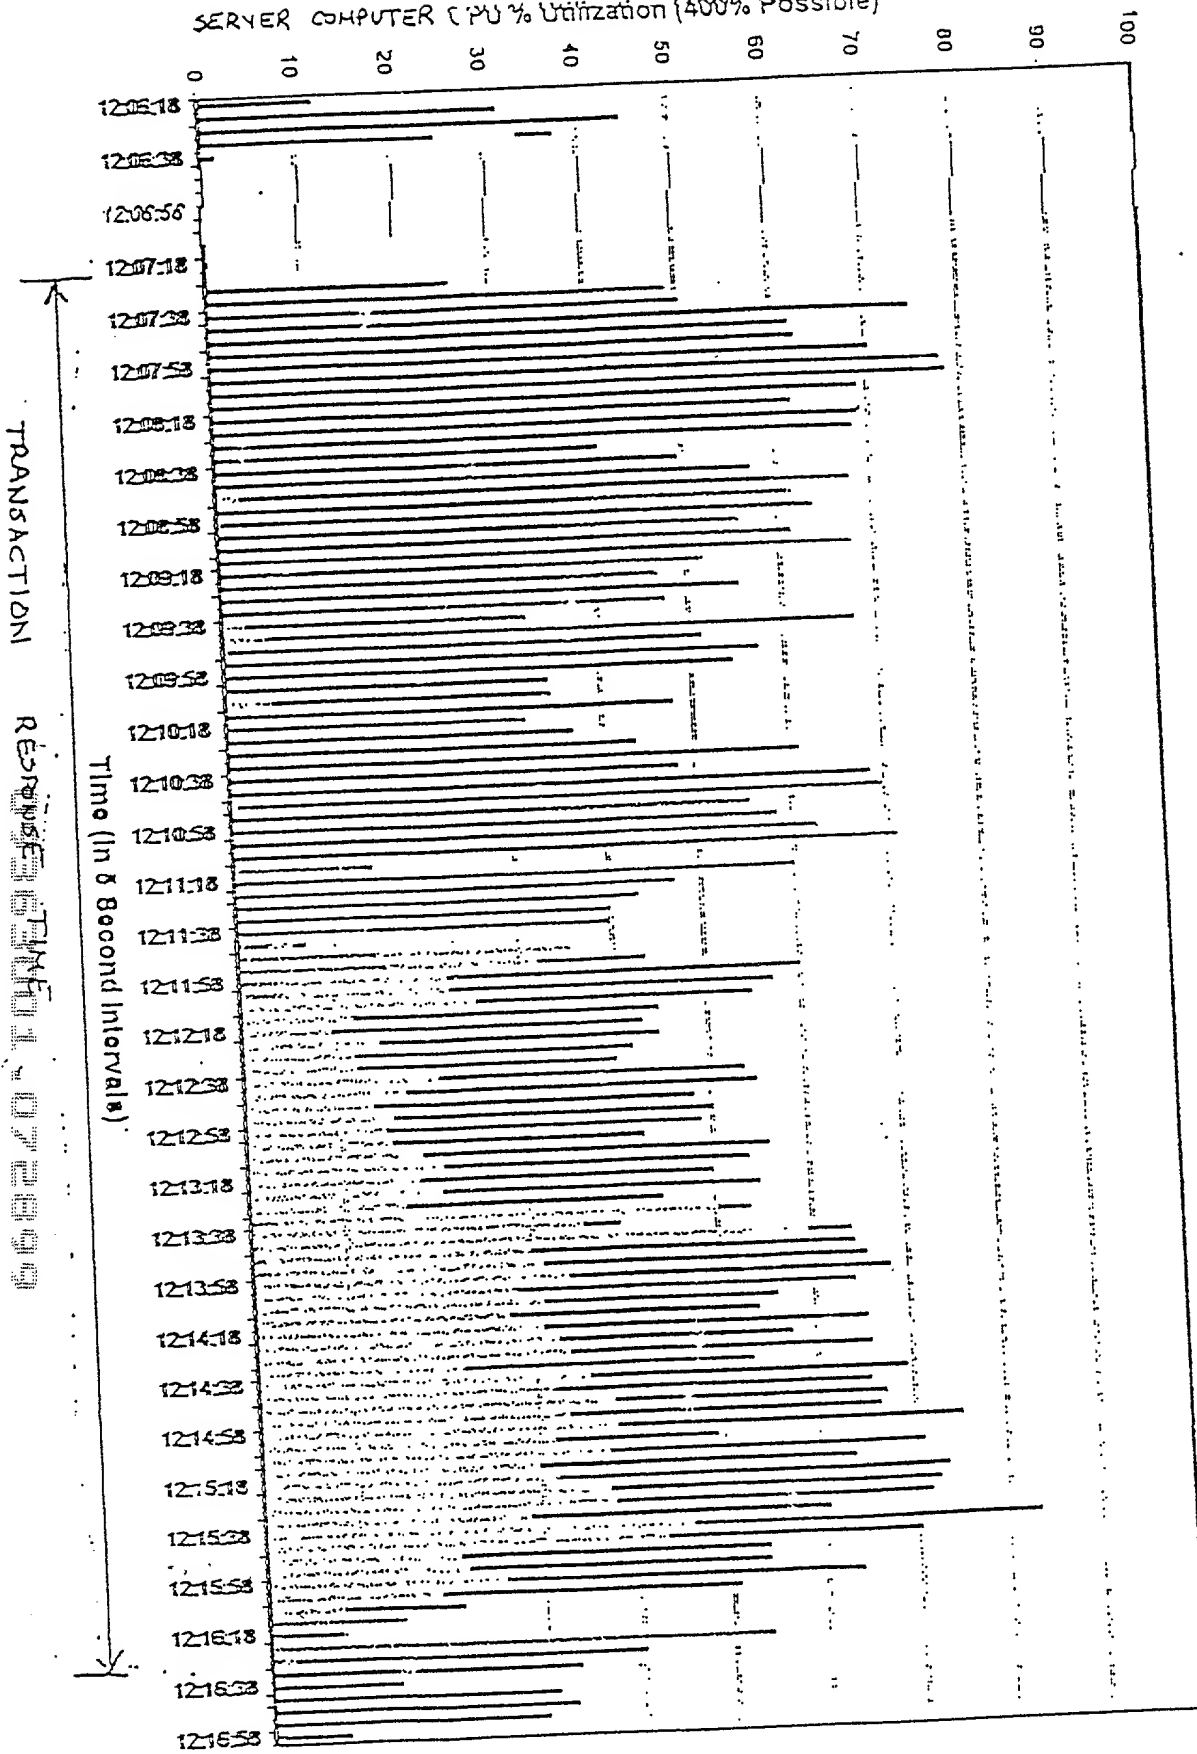


FIG. 12

RULE 63 (37 CFR 1.63)
DECLARATION
FOR PATENT APPLICATION
IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

As a below named inventor, I hereby declare that my residence, post office address and citizenship are as stated below next to my name, and I believe that I am an original, first and joint inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled "METHOD AND APPARATUS FOR ANALYZING COMMUNICATIONS ON DIFFERENT THREADS (As Amended) the specification of which has been prepared and filed on August 12, 1998 receiving Serial No. 09/133, 069 and further identified as Attorney File No. 3243-2-4-1; .

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above. I acknowledge the duty to disclose information which is material to patentability in accordance with 37 CFR 1.56(a) and (b) as set forth on the attached sheet indicated Page 3 hereof and which I have read.


I hereby claim foreign priority benefits under 35 U.S.C. 119/365 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)			Priority Claimed	
<u>Number</u>	<u>Country</u>	<u>Day/Month/Year Filed</u>	<u>Yes</u>	<u>No</u>

I hereby claim the benefit under 35 U.S.C. 120/365 of all United States and PCT international applications listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in such prior applications in the manner provided by the first paragraph of 35 U.S.C. 112, I acknowledge the duty to disclose information material to patentability in accordance with 37 CFR 1.56(a) and (b) which occurred between the filing date(s) of the prior application(s) and the national or PCT international filing date of this application:

<u>Application Serial No.</u>	<u>Filing Date</u>	<u>Status: patented, pending, abandoned</u>
09/066,508	4/23/98	Pending when filed
which is a continuation of		
08/513,435	8/10/95	Patented

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

1) Inventor's Signature  Date 2/9/99

Inventor's Name (typed): Steven J. Moore

Citizenship: U.S.A.

Residence: 5559 Irish Pat Murphy Drive
Parker, Colorado 80134

Post Office Address*: Same as Residence

*Complete Post Office Address in full if different from Residence, otherwise indicate that the Post Office Address is "Same as Residence."

2) Inventor's Signature  Date 2/3/99

Inventor's Name (typed): James M. Rosborough

Citizenship: U.S.A.

Residence: 2400 South Brentwood Street
Lakewood, Colorado 80227

Post Office Address*: Same as Residence

*Complete Post Office Address in full if different from Residence, otherwise indicate that the Post Office Address is "Same as Residence."